




**International Automotive Trading Inc.**

# ALTERNATOR ROTORS

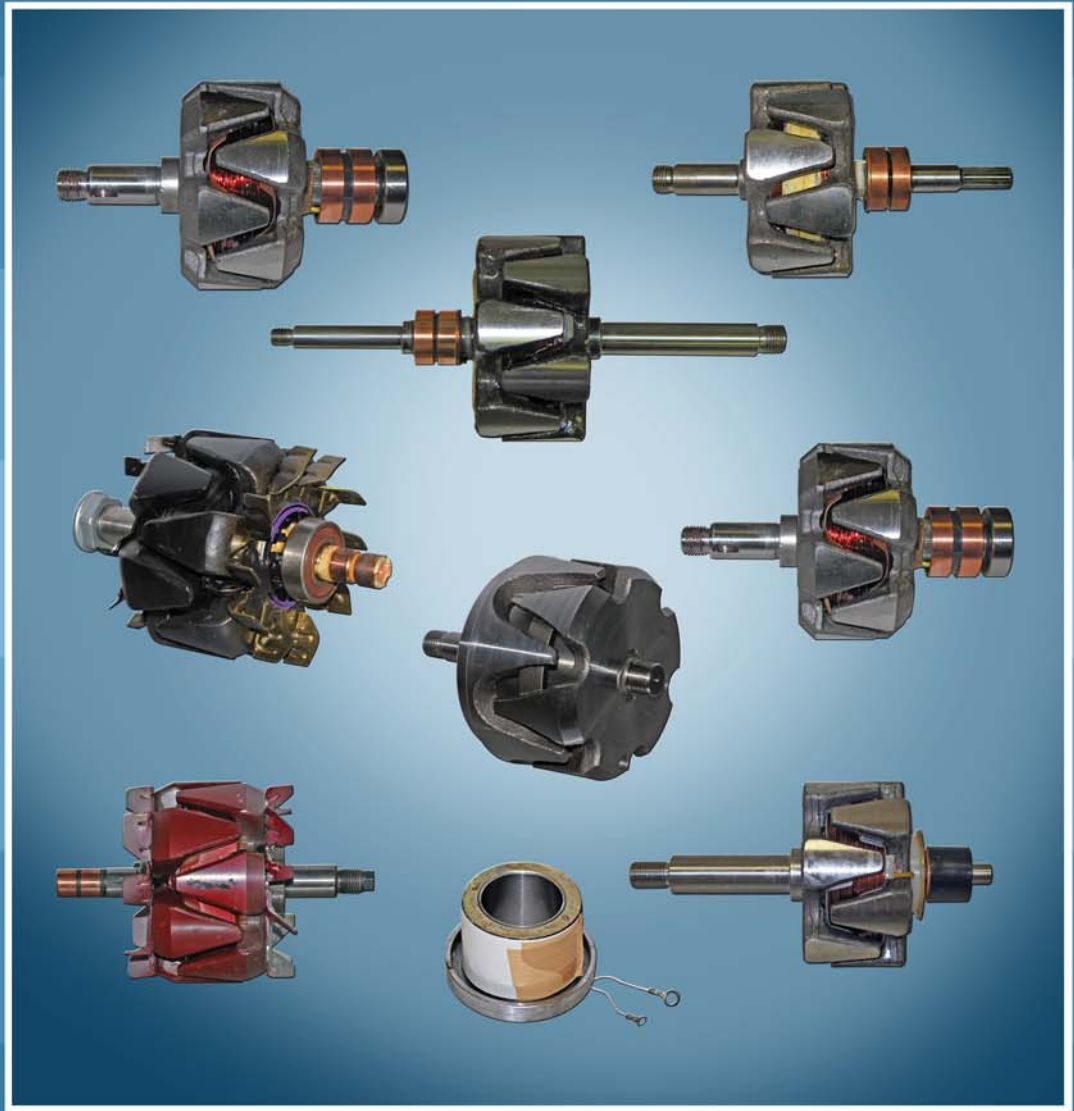

**EDITION 2017**

**BOSCH**



**17101 12V**


**REPLACES:** 1-124-035-000, -003, -014, -038, -042, -069, -073, -102, -175, -183; BMW: 12-31-1-288-424; Magirus: 812-3584; BMW: 12-31-1-288-424; VW: 035-903-213B, -213C, -213D; 069-903-213A, 069-903-213D; Valmet: 835-330-423.

**APPLICATIONS:** Audi, BMW, Chevrolet, Ferrari, Magirus-Deutz, Mercedes, New Holland, Porsche, Valmet, Volkswagen. **Bosch 70 Amp. EF Alternators w/ IC Regulator.**

**ALTERNATOR #S:** 0-120-450-004; 0-120-469-500, -501 to -505, -524, -525, -528, -533, -538, -539, -541 to -544, -551 to -554, -560, -561, -575, -576, -577, -578, -593, -598, -599, -818, -819.

**LESTER #S:** 13122, 14000, 14483, 14603, 14767, 14782, 14783, 14791, 14972.

**DIMENSIONS:** Rotor OD - 1001 mm, Core L - 52.9 mm, Shaft L - 162.0 mm, DE Shaft D - 16.99 mm, DE Shaft L - 58.5, Slip Ring OD - 276 mm.



**17102 12V**


**REPLACES:** 1-124-034-091, -130, -206, -222, -601, -783; Volkswagen: 056-903-213.

**APPLICATIONS:** Alfa Romeo, Audi, BMW, Opel, Saab, Volkswagen. **Bosch 65 Amp. EF Alternators.**

**ALTERNATOR #S:** 0-120-489-615, -618 to -621, -660, -681, -687, -688, -711 to -718, -758, -780, -781, -857, -867, -868, -869; AL41X, AL42X, AL99X.

**LESTER #S:** 13102, 13113, 13129, 13147, 13150, 14395, 14779, 20250, 20983, 21318.

**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 49.0 mm; Shaft L - 150.9 mm, DE Shaft D - 16.99 mm, SRE Shaft D - 12 mm, DE Shaft L - 57.5 mm, Slip Ring D - 276 mm, Poles - 6.



**17103 12V**

**REPLACES:** 1-124-034-036, -084, -115, -139, -572, -686; Alfa-Romeo: 116-76-05-060-00/03; Fiat: 60732883, 929186, 9935834; Volvo: 1259574.

**APPLICATIONS:** Claas Combines, Deutz-Fahr Tractors, IHC Loaders, Iveco Trucks, KHD Trucks, Mercury Capri, Mercedes, New Holland Combines, Same Tractors, Volvo.

**Bosch 55 Amp. EF Alternators.**

**ALTERNATOR #S:** 0-120-400-912, -913, -932, -933, -938, -939, -941 to -943; 0-120-489-020, -506, -507, -526, -527, -541, -542, -556, -570, -585, -586, -635, -636, -683, -742, -743, -753, -763, -770, -778, -786, -788, -822, -828, -838, -878; 9-120-144-238; AL97X, AL111X, AL911X.

**LESTER #S:** 13056, 13108, 13204, 14048, 14057, 14070, 14390, 14538, 14781.

**DIMENSIONS:** Rotor D - 89.0 mm, Core L - 47.4 mm; Shaft L - 154.4 mm; DE Shaft D - 17.0 mm, SRE Shaft D - 12 mm, DE Shaft L - 58.7 mm, Slip Ring D - 33.0 mm, Poles - 6.



**17105 12V**

**REPLACES:** 1-124-034-167, -183, -316, -363, -365, -506, -691; BMW: 12-31-1-279-588; Saab: 8571887; Volkswagen: 068-903-213B.


**APPLICATIONS:** Audi 4000, 5000, Coupe; Saab 900; VW Cabriolet, Dasher, Golf/ Jetta, Rabbit, Scirocco. **Bosch 70 Amp. EF Alternators.**

**ALTERNATOR #S:** 0-120-400-944, -945; 0-120-488-100, -102, -103, -162, -163, -170 to -173, -186, -187, -190 to -193, -198, -199, -202, -227, -237, -238, -240, -255, -494; 0-120-489-001 to -005, -016, -017, -063, -081, -186, -189, -190, -195 to -197, -202, -203, -206, -207, -210, -211, -248, -249, -282, -283, -358, -364 to -366, -369 to -371, -374, -375, -378, -379, -381, -386, -425, -429, -430, -431, -434, -435, -438, -441, -442, -445, -448, -449, -493, -494, -497, -499, -882, -973, -974, -975, -978 to -981;

9-120-144-265, -266; 9-120-334-308; AL16X, AL22X, AL25X, AL26X, AL212X.

**LESTER #S:** 13129, 13147, 13379, 14395, 14398, 14412, 14595, 14787, 14797, 14818, 14969, 14970.

**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 49.2 mm, Shaft L - 150.8 mm, DE Shaft D - 17.0 mm, DE Shaft L - 57.5 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Poles - 6.



**17106 12V**

**REPLACES:** 1-124-034-123, -155, -561, -758; Claas: 132-649-0; IHC: 3079 384 R2; John Deere: AL30416; KHD: 130-8781.

**APPLICATIONS:** ABG, Case, Claas, Deutz-Fahr Tractors, Dresser, Eicher, Fendt, Iveco-Fiat, John Deere Combines, IHC Trucks, KHD Trucks, Magirus-Deutz, Mercedes Trucks & Tractors, Ford New Holland Tractors, Orenstein, Unimog, Schlueter.

**Bosch 65 Amp. Alternators with IC Regulator.**

**ALTERNATOR #S:** 0-120-489-022, -703, -704, -710, -725, -901, -902, -925, -994, -995, -996; AL9915X.

**LESTER #S:** 13192, 13193, 13203, 14390.

**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 46.3 mm, Shaft L - 154.0 mm, DE Shaft L - 59.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm,



**17107 12V**

**REPLACES:** 1-124-034-022, 384; Bomag: 057-268-34; Fiat: 82283090; KHD: 130-7184; Saab: 8505273; Scania: 288098; Volvo: 243289.

**APPLICATIONS:** ABG, Atlas Excavators, Bomag, Case, Claas, Ford New Holland, IHC, Iveco, KHD Trucks, Komatsu Crawler D30E, Liebherr Excavators, Magirus-Deutz, Mercedes Trucks, Porsche, Saab, Scania Unimog, Trucks, Volvo Trucks.

**Bosch 50 Amp. ER Alternators.**

**ALTERNATOR #S:** 0-120-400-634, -635, -643, -644, -648, -652, -665, -679, -680, -693, -709, -714, -716, -717, -725, -765, -788, -789, -793, -798, -875, -934; AL21X, AL72X, AL74X, AL94X, AL914X.

**LESTER #S:** 13025, 13028, 13030, 13034, 13038, 13040, 13069, 13202, 14389.

(17107 Cont'd)

**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 47.6 mm; Shaft L - 147.2 mm, DE Shaft L - 57.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 33.5, Poles - 6.



**17108 12V**


**REPLACES:** 1-124-034-161, -244, -246, -277, 330, -354, -362, -584, -589, -668, -770; Fiat: 9950050; Magirus: 812-1107.

**APPLICATIONS:** Agco Allis, Ferrari, Fiat, Fiat Tractors, Ford, Iveco, Lancia, Magirus-Deutz, Mercedes, Pontiac, Saab 900/ 9000. **Bosch 65-70 Amp. ER Alternators with IC Regulator.**

**ALTERNATOR #S:** 0-120-488-124, -134, -144, -145, -151, -166, -167, -183, -184, -219, -220, -225, -229, -230, -231, -233, -246, -247, -250, -251, -261, -262, -295; 0-120-489-024, -064, -128, -129 to -431, -136, -137, -142, -143, -149, -150, -152 to -155, -168, -171, -182, -212, -219, -220, -242, -243, -254, -274, -275, -276, -279, -298, -299, -307, -312, -318, -319, -338, -350, -351, -354 to -357, -400, -401, -418, -419, -420, -455, -928, -935, -936; 9-120-144-257, -258, -287, -288.

**LESTER #S:** 12048, 13151, 13152, 13153, 13154, 13218, 14575, 14605, 14824, 14965.

**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 49.5 mm; Shaft L - 153.36 mm, DE Shaft L - 56.5 mm, DE Shaft D - 17 mm, SRE Shaft L - 12 mm, Slip Ring D - 276 mm, Poles - 6.



**17110 12V**

**REPLACES:** 1-124-035-030, -061, -062, -072, -154, -155, -156, -157; BMW: 12-31-1-727-742, -735-309; Fiat: 99444939, 9944939, 9950119, 9950382; Saab: 9513144; VW: 026-903-213B, 74-903-213B, 034-903-213; Volvo: 1324958, 1363467.

**APPLICATIONS:** Audi, BMW, Fiat, Ford, Mercedes, Merkur, Opel, Volkswagen, Volvo.

**Bosch 90 Amp. EF Alternators.**

**ALTERNATOR #S:** 0-120-469-009, -016, -017, -020, -021, -028, -029, -034, -035, -547, -559, -566, -581, -582, -586 to -589, -590, -591, -600 to -605, -608, -609 to -611, -620, -631, -632, -633, -635 to -638, -642, -644, -645, -659 to -662, -665, -669, -671, -672, -674 to -677, -689, -690, -696 to -709, -711, -712 to -720, -722 to -743, -747, -748, -754, -768, -774 to -780, -782, -783, -791, -792, -801, -802, -804 to -806, -813, -814, -822, -823, -831, -832, -835, -839, -844 to -848, -858 to -861, -863, -870, -871 to -875, -878, -879, -892, -893, -899, -903, -904, -908, -909, -910, -913, -914, -923, -924, -929, -930 to -934, -936 to -940, -953, -958, -962, -970, -976, -977, -979, -980, -981, -988 to -991; 6-033-G30-46B; 6-033-GB3-046.

**LESTER #S:** 12374, 13023, 13191, 13244, 13246, 13247, 13368, 13369, 13370, 13371, 13372, 13373, 13374, 13401, 13468, 13469, 13603, 13618, 13625, 14396, 14418, 14420, 14765, 14778, 14782, 14783, 14785, 14789, 14791, 14799, 14800, 14812, 14813, 14814, 14821, 14822, 14823, 14825, 14944, 14964, 14972, 14988, 22454, 22611, 23581, 23630, 23630, 23664.

**DIMENSIONS:** Rotor D - 1001 mm, Core L - 52.83 mm; Shaft L - 155.8 mm; DE Shaft L - 58.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 276 mm, Poles - 6.

(17107 Cont'd)

**BOSCH**



**17111 12V**

**REPLACES:** 1-124-034-309, 310, 311, 319, 320, -636, -638, -639.

**APPLICATIONS:** Mercedes 190D, 190E, 200, 230, 250D, 260E, 300E, 300D, E200D, E250D, E300D.  
**Bosch 70 Amp. E/F Alternators.**

**ALTERNATOR #S:** 0-120-484-029, 0-120-488-126; AL65X; 0-120-489-325 to 332; 9-120-620-490, -508.

**LESTER #S:** 14820, 14833.

**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 48.6 mm; Shaft L - 148.0 mm, DE Shaft L - 53.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 276 mm, Poles - 6.



**17112 12V**

**REPLACES:** 1-124-034-159, -243, -255, -302, -573, -574, -722, -723, -764, -765; Fiat 8121113, 9818260, 9938341; KHD: 132-0412; Same: 294392508; Volvo: 1323482, 9122995.

**APPLICATIONS:** Alfa-Romeo, Fiat, Hyundai, Mercedes, Volvo. **Bosch 55 Amp. EF Alternators.**

**ALTERNATOR #S:** 0-120-400-914 to -919, -926, -927; 0-120-489-061, -065, -066, -069, -070, -140, -141, -170, -183, -188, -215, -217, -218, -232 to -234, -286, -294 to -297, -300 to -302, -309, -349, -469, -470, -917, -918, -930, -931, -932, -933, -985; 0-123-320-050; 9-120-144-235; 9-120-234-234, -380; 9-120-334-314, -318, -320, -328; AL68X, AL70X, AL80X.

**LESTER #S:** 12219, 13028, 13036, 13050, 13055, 13056, 13073, 13077, 13094, 13101, 13107, 13108, 13109, 13116, 13138, 13150, 13151, 13153, 13154, 13204, 13204, 13205, 13205, 14046, 14048, 14048, 14057, 14392, 14421, 14538, 14539.

**DIMENSIONS:** Rotor D - 100 mm; Core L - 52.8 mm; Shaft L - 155.8 mm, DE Shaft L - 58.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 276 mm, Poles - 6.



**17113 12V**

**REPLACES:** 1-124-035-091, -094, -096, -107, -117, -143, -198, -199, -200, -207, -208, -228, -231; BMW: 12-31-1-735-312; Fiat: 9941936; Saab: 9124314; VW: 046-903-213B, -213C; 077-903-213, 077-903-213A.

**APPLICATIONS:** Alfa-Romeo 164 3.0L; Audi 90, 100, 200, S4, V8 Quattro; BMW 525i, 535i; Jaguar XJ6, XJS; Saab 9000 2.0/ 2.3L.

**Bosch 110/120 Amp. IR Alternators.**

**ALTERNATOR #S:** 0-120-468-017, -018 to -027, -034, -035, -036, -042 to -046, -052, -056, -068, -070, -079, -088, -089, -091, -092, -106, -108, -109, -112, -121, -122, -123, -126; Bosch Reman.: AL129X, AL147X, AL174X, AL179X, AL192X.

**LESTER #S:** 13216, 13235, 13242, 13281, 13360, 13602.

**DIMENSIONS:** Rotor D - 102.9 mm, Core L - 54.0 mm; Shaft L - 161 mm, DE Shaft L - 58.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 276 mm, Poles - 6.



**17114 12V**


**REPLACES:** 1-124-035-133, -191, -192, -193, -194.

**APPLICATIONS:** Chrysler / Dodge / Plymouth, Mercedes. **Bosch 80-90 Amp. E/F Alternators.**

**ALTERNATOR #S:** 0-120-450-018, -019 to -031; 0-120-469-744, -745, -746, -811, -894, -896, -897, -925, -926, -927, -928, -943, -946, -947, -948; AL66X, AL165X, AL486X, AL584X, AL6507X.

**LESTER #S:** 13243, 13315, 13317, 13367.

**DIMENSIONS:** Rotor D - 100 mm, Core L - 54.0 mm, Shaft L - 161 mm, DE Shaft L - 52.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 270 mm, Poles - 6.



**17115 12V**

**REPLACES:** 1-124-034-325, -341, -364, -667;

IHC: 1987 499 Ct; VW: 050-903-213.

**APPLICATIONS:** Atlas Copco XAI75, Audi, Carrier Refrigeration Units, Case, Hyundai Excel, Ingersoll Rand Compressors, Saab, Taylor Forklift w/ 5.9L Cummins Engine, Thermo King.

**Bosch 65 Amp. IR / EF Alternators.**


**ALTERNATOR #S:** 0-120-484-205; 0-120-488-111, -112, -139, -142, -143, -146 to -150, -152, -178, -181, -200, -201, -205, -211, -221, -228, -243, -254, -279, -287, -293; 0-120-489-072, -073, -253, -272, -273, -310, -346, -347, -352, -397, -398, -405, -408, -424, -450, -460, -461, -471, -472, -475, -482, -483, -484, -485, -488 to -492, -498, -575, -930;

9-120-144-256, -258, -293, -294, -297, -298;

9-120-334-327; Bosch Reman.: AL9959X.

**LESTER #S:** 12146, 12161, 12225, 13195, 13199, 13218, 13219, 13236, 13291, 14394, 14824, 20920, 23712.

**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 48.6 mm; Shaft L - 154.0 mm, DE Shaft L - 59.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 270 mm, Threads - 16 mm-1.5.



**17116 24V**

**REPLACES:** 1-124-035-339, -677; IHC: T 941 522;

Iveco: 93191994; KHD: 131-9342.


**APPLICATIONS:** Bosch Tractors, Case Excavators / Dozers, Hamm Tractors, Iveco Trucks, IHC, KHD Trucks, John Deere Crawlers, John Deere Marine, Komatsu Crawlers, Onan, Poclain Tractors.

**Bosch 35-45 Amp. I/R Alternators.**

**ALTERNATOR #S:** 0-120-488-206, -234, -252, -253, -266, -283, -288, -294; 0-120-489-481; AL9940X, AL9948X.

**LESTER #S:** 12147, 12148.

**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 48.6 mm; Shaft L - 154.2 mm, DE Shaft L - 59.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 270 mm, Poles - 6.



**17120 24V**

**REPLACES:** 1-124-037-002, -004; 1-127-011-171;

DAF: 1287820; MAN: 81-26102-0033;

Mercedes: 000-150-16-72; Scania: 1347011, 1347017; Volvo: 1698758; 1698966.

**APPLICATIONS:** DAF Drogmoller, Kassbohrer, MAN, Mercedes, Otomarsan, Pegaso, Scania, Volvo. **Bosch 120 Amp. E/F Alternators.**

**ALTERNATOR #S:** 0-120-689-520, -522, -526, -528, -531, -533, -534, -540, -542, -543, -545, -551, -553, -557, -558, -559, -561 to -564, -566, -567, -571, -572, -573, -574, -576, -577, -584, -591.

**LESTER #S:** 12376, 12376, 12377, 12576, 12610, 12611, 12612, 12615, 12616, 12617, 12618, 12623.

**DIMENSIONS:** Rotor D - 124.9 mm, Core L - 754 mm, Shaft L - 247.3 mm, DE Shaft D - 301 mm.



**17121 12V**

**REPLACES:** 9-122-080-733; Maxion: 360311 M91;

Mercedes: 000-154-57-15.

**APPLICATIONS:** Case, Cummins, Komatsu Crawlers, Massey Ferguson MF3640, Maxion, Mercedes Trucks, MWM-Diesel, Yanmar. **Bosch 35 - 55 Amp. I/R Alternators.**

**ALTERNATOR #S:** 9-120-080-112, -113, -158, -218;

Bosch Reman.: AL926X; Yanmar: NS75.77200.

**LESTER #S:** 12220, 14391.

**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 476 mm, Shaft L - 166.0 mm, DE Shaft L - 71.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 275 mm, Poles - 6.



**17122 12V**

**REPLACES:** 1-124-034-321, -327, 360; Fiat: 9944936;

IHC: 1530 368 Ct; KHD: 131-8487, 131-8758;

Iveco: 93160608; John Deere: AL68885;

Magirus-Deutz: 798-4710; Volvo: 1398115.

**APPLICATIONS:** Agco Allis, BMW Marine, Case Tractors, Caterpillar, Deutz-Allis Tractors, Deutz-Fahr Tractors, Fendt, Fiat, Hyundai, John Deere, Mitsubishi, Mercedes, Opel, Steyr, Volvo, VM Diesel, Zetor Tractors.

**Bosch 55 Amp. EF Alternators.**

**ALTERNATOR #S:** 0-120-488-114, -115, -120 to -123, -130, -131, -138, -160, -161, -185, -194, -195, -209, -217, -218, -244, -245, -257 to -260, -267, -284, -285, -286, -290; 0-120-489-107, -134, -135, -146, -147, -151, -170, -187, -188, -216 to -218, -285, -295, -297, -308, -336, -337, -395, -396, -402, -421 to -423, -465, -466, -985; 9-120-144-269, -273, -279, -295; 9-120-234-270, -274, -280, -292, -296, -305, -311, -314, -318, -320, -328;


9-120-334-313, -314, -317, -318, -320; AL123X, AL906X, AL914X, AL5012N, AL5052X.

**LESTER #S:** 12164, 12595, 13195, 13199, 13205, 13219, 13377, 14057, 14392, 14394, 14421, 14423, 14481, 14604, 14876, 20568, 20712, 22693, 23696, 23712.

**DIMENSIONS:** Rotor D - 89.7 mm, Core L - 476 mm; Shaft L - 154.0 mm, DE Shaft D - 17 mm;

Slip Ring - 28 mm.

**BOSCH**



**17123 24V**

**REPLACES:** 1-124-034-677, -678, -339, -350; IHC: T 941 522; KHD: 131-9342; 132-1479; Iveco: 93191994; MAN: 81-26102-0036.  
**APPLICATIONS:** ABG, Case Excavators/ Loaders, Fuchs Excavators, Hamm, Iveco Trucks, John Deere Crawlers/ Excavators/ Graders, John Deere Marine, KHD Engines, Komatsu Crawlers, Liebherr Excavators, MAN Trucks, Onan, Poclair, Scania Trucks. **Bosch 35-45 Amp. EF Alternators.**  
**ALTERNATOR #S:** 0-120-488-153, -206, -234, -252, -253, -266, -269, -270, -283, -288, -292, -294; 0-120-489-481; 6-033-G20-04B; AL9940X, 9948X.  
**LESTER #S:** 12134, 12147, 12148, 12219, 20976.  
**DIMENSIONS:** Rotor D - 88.9 mm, Core L - 476 mm; Shaft L - 154.0 mm, DE Shaft L - 58.6 mm, DE Shaft D - 17 mm, SRE Shaft - 12 mm, Slip Ring D - 276 mm.




**17124 12V**

**REPLACES:** 1-124-034-652.  
**APPLICATIONS:** Case Tractors, Loaders, Caterpillar Backhoe Loader, Cummins Engine, JCB Loaders, John Deere Crawlers, Excavators, Graders, Farm & Industrial Tractors.  
**Bosch 95 Amp. Industrial IR Alternators.**  
**ALTERNATOR #S:** 0-120-484-011, -018, -026, -050; AL9909X; John Deere: RE36267.  
**LESTER #S:** 12145.  
**DIMENSIONS:** Rotor D - 934 mm, Core L - 464 mm; Shaft L - 154.0 mm; Shaft D - 16.99 mm.



**17125 12V**

**REPLACES:** 1-124-034-260, -343, -347, -650, -651, -653; Fiat: 60752010, 9945066.  
**APPLICATIONS:** Alfa-Romeo 164 3.0L, Deutz-Allis Tractors, Deutz-Fahr Tractors, Iveco Trucks, John Deere Tractors, New Holland Windrowers, Thermo King Trailer Units, Yamaha Engines.  
**Bosch 65-90 Amp. EF/ IR Alternators.**  
**ALTERNATOR #S:** 0-120-484-002, -003, -004, -005, -006, -009, -010, -013, -014, -016, -020, -049; 9-120-060-020, -023, -038, -040, -041; F-005-A00-023, -024; AL0013X, AL595X, AL929X, AL9935X, AL9959X, AL9971X, AL9974X.  
**LESTER #S:** 12151, 12158, 12159, 12169, 13300, 13375.  
**DIMENSIONS:** Rotor D - 934 mm, Core L - 46.5 mm; Shaft L - 154.2 mm, DE Shaft L - 57.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm.



**17127 12V**

**REPLACES:** 1-124-034-660; John Deere: AL 78689.  
**APPLICATIONS:** John Deere Combines & Tractors.  
**Bosch 120 Amp. IR / EF Alternators.**  
**ALTERNATOR #S:** 0-120-484-017, -019; AL9943X.  
**LESTER #S:** 12168.  
**DIMENSIONS:** Rotor D - 89.0 mm, Core L - 49.5 mm; Shaft L - 154.0 mm, DE Shaft L - 57.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm.



**17128 12V**

**REPLACES:** 1-124-035-213; IHC: 1964-728-C1.  
**APPLICATIONS:** Case, John Deere, IHC Combines.  
**Bosch 110-135 Amp. Alternators.**  
**ALTERNATOR #S:** 0-120-468-028, -055; AL9941X.  
**LESTER #S:** 12131, 12162.  
**DIMENSIONS:** Rotor D - 103.0 mm, Core L - 54.5 mm; Shaft L - 201.1 mm, DE Shaft L - 97.5 mm, Shaft D - 22.3 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 5/8-18.




**17129 12V**

**REPLACES:** 1-124-035-123, -201; BMW: 12-31-1-738-107.  
**APPLICATIONS:** BMW 325is, 325ic, 525i, 525it, 525ix.  
**Bosch 115-140 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-120-468-061 to -064, -075, -076, -077, -078, -102, -103, -104, -105, -110, -111; AL0154X, AL0741X, AL0746X.  
**LESTER #S:** 13364, 13366, 13405.  
**DIMENSIONS:** Rotor D - 103.0 mm, Core L - 54.5 mm, Shaft L - 164.1 mm, Shaft D - 22.3 mm.



**17130 12V**

**APPLICATIONS:** Thermo King Industrial Equipment.  
**Bosch 90 Amp. K1 Type Alternator.**  
**ALTERNATOR #S:** F-005-A00-028, BXT1290, BB.  
**LESTER #S:** 12614.  
**DIMENSIONS:** Rotor D - 93.3 mm, Core L - 46.6 mm; Shaft L - 156.4 mm, DE Shaft L - 60.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 16-1.5.




**17131 24V**

**REPLACES:** 1-124-035-221; Volvo: 1698180.  
**APPLICATIONS:** Volvo Industrial Loaders & Buses.  
**Bosch 80 Amp. EF Alternators.**


(17131 Cont'd)

**ALTERNATOR #S:** 0-120-468-037, 0-120-468-114.  
**LESTER #S:** 12571.  
**DIMENSIONS:** Rotor D - 1034 mm, Core L - 54.0 mm, Shaft L - 164.0 mm, DE Shaft L - 61.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm.




**17132 12V**

**REPLACES:** 1-124-035-171, 1-124-035-078, 1-124-035-394; Mercedes: 000-154-72-15.  
**APPLICATIONS:** Massey Ferguson Combines, Mercedes Trucks, Scania Trucks.  
**Bosch 90 Amp. IR / EF Alternators.**  
**ALTERNATOR #S:** 0-120-469-013, -040, -687, -762, -895; Bosch Reman.: AL924X.  
**LESTER #S:** 12160, 12378.  
**DIMENSIONS:** Rotor D - 1001 mm, Core L - 53.9 mm, Shaft L - 172.5 mm, DE Shaft L - 64.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm.




**17133 12V**

**REPLACES:** 1-124-034-240, -616.  
**APPLICATIONS:** Bedford 1.6L Diesel, BMW 318i, Opel.  
**Bosch 45/55 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-489-120, -121, -122, -125.  
**LESTER #S:** 20440, 20441.  
**DIMENSIONS:** Rotor D - 89.0 mm, Core L - 47.4 mm; Shaft L - 148.0 mm, DE Shaft L - 53.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm.



**17134 24V**

**REPLACES:** 1-124-035-260.  
**APPLICATIONS:** KHD Trucks, MWM-Diesel.  
**Bosch 55 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-469-102.  
**DIMENSIONS:** Rotor D - 100.0 mm, Core L - 53.8 mm; Shaft L - 157.0 mm, DE Shaft L - 57.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm.



**17135 12V**

**REPLACES:** 1-124-034-418, -427, -428, -457, -906, -968.  
**APPLICATIONS:** Mercedes, Alfa Romeo.  
**Bosch 80-90 Amp. IR/IF Alternators.**  
**ALTERNATOR #S:** 0-120-485-025, -026; 0-123-310-004, 0-123-320-004, 0-123-335-003, 0-123-345-004; AL0161X.  
**LESTER #S:** 13613, 21447, 21788, 22738, 22763.  
**DIMENSIONS:** Rotor D - 93.3 mm, Core L - 50.0 mm, Shaft L - 153.6 mm, DE Shaft L - 50.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Poles - 6, Rotation - CW, Threads - 16 mm - 1.5.


(17131 Cont'd)

**BOSCH**



**17136 12V**

**REPLACES:** 1-124-035-100, 1-124-035-150; BMW: 12-31-1-318-230.  
**APPLICATIONS:** BMW 530i, 535i, 730i, 735i, M5. **Bosch 115-140 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-468-007, -008, -013, -014, -050, -051, -067, -073, -074, -095 to -098; AL143X, AL145X, AL148X, AL0740X.  
**LESTER #S:** 13216, 13268, 13270, 13362, 13365, 14956.  
**DIMENSIONS:** Rotor D - 1034 mm, Core L - 53.8 mm, Shaft L - 166.0 mm, DE Shaft L - 61.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 16-1.5.



**17137 12V**

**REPLACES:** 1-124-034-451, -907, -944, -945, -947, -956, -960; Volkswagen: 058-903-213.  
**APPLICATIONS:** Audi /VW 1.8L, BMW, Saab. **Bosch 80-90 Amp. IR/IF Alternators.**  
**ALTERNATOR #S:** 0-120-485-048, 0-123-315-013; 0-123-320-016, -028, -030, -039, -052, -053, -054, -057; 0-123-325-007, -010; 0-123-335-005; AL0037X, AL0707X, AL0735X, AL0749X.  
**LESTER #S:** 13465, 13610, 13761, 13816, 13830.  
**DIMENSIONS:** Rotor D - 93.2 mm, Core L - 50.0 mm, Shaft L - 162.0 mm, DE Shaft L - 51.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Threads - 16-1.5.



**17138 28V**

**REPLACES:** 1-124-035-229; Volvo: 3090428.  
**APPLICATIONS:** Volvo Trucks FN12-340, -380, -420, -470, -520 (12.0L/ 16.0L). **Bosch 80 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-468-093; Volvo: 1096758.  
**LESTER #S:** 12596.  
**DIMENSIONS:** Rotor D - 1034 mm, Core L-53.6 mm, Shaft L - 162.5 mm, DE Shaft L - 51.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 16-1.5.




**17139 28V**

**REPLACES:** 1-124-035-261; Mercedes: 000-154-64-15.  
**APPLICATIONS:** Mercedes Trucks (4.3/6.0/ 12.0/ 16.0L). **Bosch 80 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-469-115, -116, -117, -118; 6-033-G3B-022; 6-033-GB3-019, -022, -027.  
**LESTER #S:** 12386.  
**DIMENSIONS:** Rotor D - 103.5 mm, Core L-54.0 mm, Shaft L - 171.0 mm, DE Shaft L - 66.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 16-1.5.




**17140 12V**

**REPLACES:** 1-124-035-407, -414, -434, -456, -519, -520.  
**APPLICATIONS:** Cadillac Catera 3.0L, Saab 900 2.5L. **Bosch 120 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-123-505-001, -004, -020; 0-123-510-020, -043, -062, -063, -064, -069; AL0780X, AL8500X.  
**LESTER #S:** 13736, 20317, 21166, 21255.  
**DIMENSIONS:** Rotor D - 1034 mm, Core L - 50.0 mm, Shaft L - 155.5 mm, DE Shaft L - 56.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Threads - 16-1.5.



**17141 12V**

**REPLACES:** 1-124-035-400, -416, -438, -457, -463, -466, -500, -501, -503, -506; Volvo: 3544564, 128977; VW: 028-903-213H, 028-903-213N.  
**APPLICATIONS:** Alfa-Romeo 164, Audi 90 Quattro/ 100 Quattro/ A4/ A6/ Cabriolet, Volvo 850/ 940/ 960 Series 2.9L/ S70/ V70/ S90/ V90, Volkswagen Eurovan/ Golf/ Jetta/ Passat. **Bosch 100-120 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-465-006 to -009, -011, -012, -018, -020, -021, -023, -026, -027 to -029; 0-123-213-005 to -007; 0-123-505-005, -010, -011, -012, -013; 0-123-510-001, -005 to -009, -017, -026, -027, -029 to -032, -034, -037, -095, -099, -106, -109; 0-123-515-003, -008, -009, -011, -017; 0-123-540-001; 0-123-545-001, -002, -003; Bosch Reman.: AL0059X, AL0159X, AL0177X, AL0184X, AL0723X, AL0770X.  
**LESTER #S:** 13357, 13382, 13417, 13422, 13617, 13622.  
**DIMENSIONS:** Rotor D - 1034 mm, Core L - 60.0 mm, Shaft L - 164.5 mm, DE Shaft L - 55.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5, Rotation - CW.



**17142 12V**

**REPLACES:** 1-124-035-401, -444, -449, -451, -499, -504; 1-124-034-441, -468; F-00M-131-608, -661.  
**APPLICATIONS:** Mercedes C280, C36, E320, E420, E500, S320, S420, S500, S600, SL320, SL500; Mercedes Trucks LT28, LT35, LT46. **Bosch 110-120 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-465-003, -004, -013 to -017; 0-123-500-001; 0-123-510-002, -012, -022, -023, -038 to -041, -044, -049 to -051, -057, -058, -059, -066, -067, -072, -080; 0-123-512-500, -501; 0-123-515-031; 0-123-540-002, -003, -004; 0-123-545-004; AL0163X, AL0168X, AL0762X, AL0763X.  
**LESTER #S:** 11041, 11083, 11124, 11134, 11210, 11214, 11235, 11314, 12370, 12383, 13356, 13357, 13359, 13623, 13631, 13777, 13793, 13797, 13803, 13810, 13812, 13819, 13853, 13854, 13872, 13881, 13882, 13884, 13904, 13916, 13917, 13920, 13922, 13951.  
**DIMENSIONS:** Rotor D - 103.3 mm, Core L - 60.0 mm, Shaft L - 159.5 mm, DE Shaft L - 50.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5, Rotation - CW.



**17143 12V**

**REPLACES:** 1-124-034-417, -433, -453, -454, -479, -483, -485, -487, -913, -934, -937, -946, -965; Volvo: 6849856; VW: 028-903-213E, -213F, -213K, -213P.  
**APPLICATIONS:** Audi A4, VW Beetle-Cabrio-Corrado-GolfJetta-Passat 1.9L/2.0L Eurovan 2.5L, Volvo 850 Series. **Bosch 70-120 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-465-020, -023, -036, -038, -039; 0-123-310-017; 0-123-310-018, -019, -020, -024, -025, -027, -031, -032, -037 to -040, -046, -049; 0-123-320-001, -002, -003, -005, -006, -008, -017 to -019, -021, -024, -025, -027, -031 to -034, -036, -037, -038, -048, -055, -059, -063; 0-123-325-005, -006; 0-123-340-001, -002, -003, -005; AL0181X, AL0183X, AL0184X, AL0185X, AL0186X, AL0187X, AL0722X.  
**LESTER #S:** 13380, 13381, 13382, 13441, 13605, 13606, 13832, 13902, 13903, 21766.  
**DIMENSIONS:** Rotor D - 93.2 mm, Core L - 504 mm, Shaft L - 158.8 mm, DE Shaft L - 55.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5, Rotation - CW.



**17145 24V**

**REPLACES:** 1-124-034-352, -648; Volvo: 1698433.  
**APPLICATIONS:** Berliet Trucks, Pegaso Trucks, Volvo Trucks / Buses, Volvo Penta Marine. **Bosch 35-45 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-120-489-060, 303, -643; 9-120-144-111, -114, -121, -124, -126.  
**LESTER #S:** 12443, 12573, 12695.  
**DIMENSIONS:** Rotor D - 89.0 mm; Rotor Th. - 47.6 mm; Shaft L - 157.0 mm; Shaft D - 17.0 mm.



**17146 24V**

**REPLACES:** 1-124-035-021, -057, -079, -177, -237; KHD: 130-9464; MAN: 81-26102-0031; Scania: 417221; Steyr: 615-00-09-0726; Volvo: 1697031; VW: 049-903-213A, -213G.  
**APPLICATIONS:** Caterpillar Wheel Loaders, Iveco, KHD Engines, MAN Trucks, Mercedes Trucks, Scania Buses, Trucks, Steyr, Volvo Trucks, VW. **Bosch 24V / 55 Amp. IR Alternators.**  
**ALTERNATOR #S:** 0-120-469-014, -018, -043, -519, -520, -521, -569, -579, -580, -643, -652, -653, -693, -752, -753, -772, -773, -798, -807, -850, -851; 6-033-G30-14B; 6-033-GB3-014, -020; AL9938X.  
**LESTER #S:** 12167, 12293, 12294, 12586, 12597.  
**DIMENSIONS:** Rotor D - 100.2 mm, Core L - 53.0 mm, Shaft L - 161.5 mm, DE Shaft L - 59.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Poles - 6, Threads - 16 mm-1.5.

**BOSCH**



**17147 12V**

**REPLACES:** 1-124-035-513, -534, -539, -540.  
**APPLICATIONS:** Mercedes C43, CLK430, E430, CL500, E55, ML430, ML55, S430, S500, S600, SL500, SL600, S55 AMG; Range Rover SE 4.0 / 4.6L.  
**Bosch 143-150 Amp. IR / IF Alternators.**  
**ALTERNATOR #S:** 0-123-510-105; 0-123-520-006, -007, -008, -010 to -013, -015, -017, -022, -023, -025, -030; AL0162X, AL0766X, AL0785X.  
**LESTER #S:** 13710, 13779, 13792, 13813, 13855.  
**DIMENSIONS:** Rotor D - 112.0 mm; Core L - 57.0 mm; Shaft L - 160.5 mm; DE Shaft D - 17.0 mm, DE Shaft L - 50.2 mm, Poles - 6, CW.



**17148 12V**

**REPLACES:** 1-124-035-190.  
**APPLICATIONS:** Mercedes 190E, 260E, 300CE, E300, 350SDL. **Bosch 80 Amp. IR / EF Alternators.**  
**ALTERNATOR #S:** 0-120-469-744, -745, -746, -811, -812, -894, -896, -897; AL66X, AL165X.  
**LESTER #S:** 13243, 13367.  
**DIMENSIONS:** Rotor D - 100.2 mm, Core L - 53.0 mm, Shaft L - 150.5 mm, DE Shaft L - 52.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Poles - 6, Threads - 16 mm-1.5.




**17149 12V**

**REPLACES:** 1-124-035-531, -536, -538.  
**APPLICATIONS:** Ford, Mercedes, VW Eurovan w/ 2.8L. **Bosch 150 Amp. IR / IF Alternators.**  
**ALTERNATOR #S:** 0-123-520-002, -005, -014; 0-123-525-001; AL0714X.  
**LESTER #S:** 11135, 23206.  
**DIMENSIONS:** Rotor D - 111.0 mm, Core L - 56.6 mm, Shaft L - 165.5 mm, DE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.




**17150 12V**

**REPLACES:** F00M-131-603.  
**APPLICATIONS:** Volvo Cross Country 24L, S60, C70, S70, V70, S80 2.9L, XC90 2.5 / 2.9L. **Bosch 120-140 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-124-515-017, -018, -019, -054; 0-124-525-001, -014, -029, -060, -061; AL0755X, AL0756X, AL0820X.  
**LESTER #S:** 11091, 11447, 13801, 13802, 13997, 13998.  
**DIMENSIONS:** Rotor D - 111.0 mm, Core L - 56.7 mm, Shaft L - 171.0 mm, DE Shaft D - 17.0 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.




**17151 12V**

**REPLACES:** 1-124-034-421, -434, -488, -935, -936; VW: 028-903-213C, -213M, -513D.  
**APPLICATIONS:** VW 1.9TDI / 2.5L / 2.8L Applications. **Bosch 70 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-120-485-034, -043, -044, -046; 0-123-114-005; 0-123-310-001, -002, -003, -007; 0-123-315-001, -002, -006; AL0185X, AL0186X.  
**LESTER #S:** 13376, 13380, 13606, 21251.  
**DIMENSIONS:** Rotor D - 93.3 mm, Core L - 48.5 mm, Shaft L - 154.0 mm, DE Shaft L - 55.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Threads - 16-1.5.




**17152 12V**

**REPLACES:** 1-124-035-475, -507; VW: 078-903-213.  
**APPLICATIONS:** Audi A4, A6, Cabrio 2.8L, S6 2.2L Turbo; Volkswagen Beetle 1.9 Diesel, Golf, Jetta, Passat 1.8L Turbo / 2.8L. **Bosch 120 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 0-123-505-018; 0-123-510-033, -045, -047, -061, -070, -071, -088, -091, -092; AL0712X; 0-123-515-012, -016, -024; AL0720X, AL0721X.  
**LESTER #S:** 13357, 13624, 13817, 13833.  
**DIMENSIONS:** Rotor D - 103.3 mm, Core L - 53.0 mm, Shaft L - 169.0 mm, DE Shaft L - 55.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 15.5 mm, Threads - 16 -1.5.




**17153 24V**

**REPLACES:** 1-124-035-167, -219, -258; DAF: 1288157; KHD: 132-1119; Mercedes: 869-154-00-33; Scania: 341589; Volvo: 3091570.  
**APPLICATIONS:** KHD Engines, Liebherr D927Ti Engine, Mercedes Trucks, Scania Trucks, Volvo Trucks. **Bosch 55 Amp. Alternators.**  
**ALTERNATOR #S:** 0-120-469-008, -036, -041, -585, -796, -854, -855; 6-033-GB3-031, -040, -053.  
**LESTER #S:** 12294, 23499.  
**DIMENSIONS:** Rotor D - 100.2 mm, Core L - 53.0 mm, Shaft L - 172.5 mm, DE Shaft L - 69.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 16 -1.5.



**17154 24V**

**REPLACES:** 1-124-035-214, 1-124-035-256.  
**APPLICATIONS:** Case, Cummins, International, John Deere. **Bosch 24V / 65 Amp. IR Alternators.**  
**ALTERNATOR #S:** 0-120-468-054, -136, -147; AL5010X, AL9946X.  
**LESTER #S:** 12149, 12157.  
**DIMENSIONS:** Rotor D - 103.0 mm, Core L - 54.2 mm, Shaft L - 201.0 mm, DE Shaft L - 97.5 mm, DE Shaft D - 22 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 5/8 -18.



**17155 12V**

**REPLACES:** 1-124-034-308, 1-124-034-636.  
**APPLICATIONS:** Mercedes 190D, 190E, 200, 230, 250D, 260E, 300E, 300D, E200D, E250D, E300D. **Bosch 55 Amp. E/F Alternators.**  
**ALTERNATOR #S:** 0-120-489-323, 0-120-489-324.  
**LESTER #S:** 14833.  
**DIMENSIONS:** Rotor D - 88.8 mm, Core L - 48.5 mm; Shaft L - 149.0 mm, DE Shaft L - 53.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring - 276 mm, Poles - 6.



**17156 12V**

**REPLACES:** 9-121-064-038, -050, -067.  
**APPLICATIONS:** Thermo King Industrial Equipment. **Bosch 37 Amp. K1 Type Alternator.**  
**ALTERNATOR #S:** 9-120-060-027; AL927X.  
**LESTER #S:** 12223.  
**DIMENSIONS:** Rotor D - 93.3 mm, Core L - 46.6 mm; Shaft L - 154.3 mm, DE Shaft L - 60.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 16-1.5.



**17157 12V**

**REPLACES:** 9-121-064-043.  
**APPLICATIONS:** Thermo King Industrial Equipment. **Bosch 65 Amp. K1 Type Alternator.**  
**ALTERNATOR #S:** 9-120-060-023, -038; AL928X.  
**LESTER #S:** 12224, 12333.  
**DIMENSIONS:** Rotor D - 93.3 mm, Core L - 46.6 mm; Shaft L - 156.4 mm, DE Shaft L - 60.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 276 mm, Threads - 16-1.5.



**17158 12V**

**REPLACES:** F00M-131-604; Iveco: 42471433; Renault: 50-01-850-104; VW: 038-903-213D.  
**APPLICATIONS:** Audi A4 - A4 Quattro / VW Passat 2.8L, Porsche 911 34L / 3.6L, Boxter 2.7L . 3.2L, Case Farm Tractors, New Holland Tractors. **Bosch 120 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-124-510-001; 0-124-515-015, -028, -040, -042, -044, -073, -113, -120; AL0700X, AL0727X, AL0812X.  
**LESTER #S:** 11041, 12579, 13810, 13922, 23172, 23177.  
**DIMENSIONS:** Rotor D - 103.0 mm, Core L - 56.5 mm, Shaft L - 161.0 mm, DE Shaft D - 17.0 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.

**BOSCH**



**17159 12V**  
**REPLACES:** F00M-131-664.  
**APPLICATIONS:** BMW 325 Series, 525 Series, 530, X3 / Z3 2.5L, 3.0L **Bosch 155 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-124-525-080, -083, -523, -524; AL0814X.  
**LESTER #S:** 11077, 11083.  
**DIMENSIONS:** Rotor D - 103.0 mm, Core L - 56.7 mm, Shaft L - 161.0 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Threads - 16 mm-1.5.



**17161 12V**  
**REPLACES:** F00M-131-608; VW: 038-903-213A.  
**APPLICATIONS:** Audi TT, VW Beetle-Golf/Jetta-Eurovan 2.8L, Chrysler Crossfire, Mercedes C230-C240-C320-C32-CLK320-E320-ML350SLK320. **Bosch 120-140 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-124-515-010 to -013, -020, -021, -022, -024 to -027, -034, -035, -038, -039, -041, -045 to -048, -055, -056, -058, -060, -061, -062, -064, -068, -079, -083, -084, -087, -088, -090, -091, -101, -102, -110, -114, -115, -117, -118, -131, -132, -134; 0-124-525-021; Bosch Reman.: AL0189X, AL0726X, AL0788X, AL0795X, AL0808X.  
**LESTER #S:** 11124, 11214, 13853, 13884, 13904, 13951.  
**DIMENSIONS:** Rotor D - 103.2 mm, Core L - 56.8 mm, Shaft L - 159.0 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Threads - 16 mm-1.5.



**17162 12V**  
**REPLACES:** F00M-131-619, F00M-131-661.  
**APPLICATIONS:** Dodge Dakota, Durango 3.7 / 4.7L, Ram 3.7 / 4.7L / 5.9 / 8.0L, Jeep Grand Cherokee 4.0L. **Bosch 132-136 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-124-525-002, -003 to -007, -041, -051, -105, -107, -110, -111, -129, -154 to -156; 6-004-ML0-000, -001, -004, -005, -017, -024; AL6400X, AL6402X, AL6403X, AL6425X, AL6427X, AL6428X, AL6429X, AL6430X, AL6450X, AL6454X.  
**LESTER #S:** 11233, 11235, 11337, 11314, 13777, 13854, 13872, 13881, 13916, 13917, 13920, 13985, 13987.  
**DIMENSIONS:** Rotor D - 103.2 mm, Core L - 56.4 mm, Shaft L - 158.2 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Threads - 16 mm-1.5.



**17163 12V**  
**REPLACES:** F00M-131-631.  
**APPLICATIONS:** Audi A4-A4 Quattro 1.8 / 3.0L-A6-RS6 4.2L, Dodge / Freightliner Sprinter 2.7L Diesel, Mercedes C240-CL500-CLK430-E320-E430-E500-E55-G500-G55-S500-S55. **Bosch 150-160 Amp. I/R Alternators.**

( 17163 Cont'd)

( 17163 Cont'd)

**ALTERNATOR #S:** 0-124-615-006 to -009, -012, -014, -015 to -022, -025, -026, -028, -032, -033, -035, -042, -044, -046, -047; 0-124-625-005, -020, -022; AL0789X, AL0798X, AL0817X.

**LESTER #S:** 11042, 11064, 11065, 11132, 12384, 12385, 13953, 23248, 24060.

**DIMENSIONS:** Rotor D - 1114 mm, Core L - 574 mm, Shaft L - 163.0 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Threads - 16 mm-1.5.



**17164 12V**

**REPLACES:** F00M-131-600, F00M-131-607, F00M-131-623, F00M-131-728, 6-004-MM0-002.

**APPLICATIONS:** Porsche 911 - Boxter, Saab 9-3 2.0L - 9-5 3.0L, Saturn I Series 2.2L, 3.0L.

**Bosch 120-150 Amp. I/R Alternators.**

**ALTERNATOR #S:** 0-124-515-001, -004, -005, -006, -008, -023, -031 to -033, -043, -049, -080, -081, -082, -085, -086, -089, -095, -096, -099, -100, -109, -112, -186, -189; 0-124-525-012, -013, -015, -017, -018, -019, -022, -030, -031, -040, -046, -058, -086; Bosch Reman.: AL0700X, AL8503X, AL8504X.

**LESTER #S:** 11043, 13805, 13810, 23025, 23295, 23296.

**DIMENSIONS:** Rotor D - 98.0 mm, Core L - 51.7 mm, Shaft L - 150.0 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17165 12V**

**REPLACES:** F00M-121-629.

**APPLICATIONS:** Buick Allure / Lacrosse 3.6L, 3.8L, Chevrolet Impala / Monte Carlo 3.5L, 3.9L, Pontiac Grand Prix 3.8L, Saab 9-3 2.0L.

**Bosch 120-125 Amp. I/R Alternators.**

**ALTERNATOR #S:** 0-124-425-004 to -010, -015, -026, -027, -028, -030 to -033, -036, -040, -041, -048, -049, -050, -053, -056, -057, -060, -061, -064; AL0833X, AL8786X, AL8807X, AL8810X, AL8812X.

**LESTER #S:** 11125, 11126, 11127, 11185, 11186, 11236.

**DIMENSIONS:** Rotor D - 981 mm, Core L - 511 mm, Shaft L - 150.5 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17166 12V**

**REPLACES:** F00M-121-624.

**APPLICATIONS:** Buick Century 31L - Regal 3.8L, Chevrolet Impala / Monte Carlo 34L, 3.8L - Malibu 34L, Oldsmobile Alero 34L, Pontiac Grand Am 34L, GM Vans 34L.

**Bosch 120-125 Amp. I/R Alternators.**

**ALTERNATOR #S:** 0-124-415-033, 0-124-415-035; 6-004-MA5-008, 6-004-MA5-011; A8776X, AL8778X, AL8502X.

**LESTER #S:** 11045, 13770, 13989.

**DIMENSIONS:** Rotor D - 98.2 mm, Core L - 53.5 mm, Shaft L - 150 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17167 12V**

**REPLACES:** F00M-131-630.

**APPLICATIONS:** BMW 325i, 330i, 530i, 540i, X3, X5.

**Bosch 120 Amp. I/R Alternators.**

**ALTERNATOR #S:** 0-124-515-050, -052, -097; AL0703X.

**LESTER #S:** 13882.

**DIMENSIONS:** Rotor D - 98.0 mm, Core L - 51.7 mm, Shaft L - 150.0 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17168 12V**

**REPLACES:** F00M-131-620.

**APPLICATIONS:** Cadillac Escalade 5.3L / 6.0L, GMC / Chevrolet Trucks 4.3L, 4.8L, 5.3L, 6.0L, Chevrolet Impala 3.8L, GM Vans 34L, 3.8L.


**Bosch 125-150 Amp. I/R Alternators.**

**ALTERNATOR #S:** 0-124-525-072, -104; AL8782X;

**6-004-ML0-012, -017, -024; AL8501X, AL8512X.**

**LESTER #S:** 11075, 13771, 13860.

**DIMENSIONS:** Rotor D - 103.2 mm, Core L - 56.6 mm, Shaft L - 156.0 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17169 12V**

**REPLACES:** F00M-121-637.

**APPLICATIONS:** Astro / Safari Vans 4.3L, Chevrolet Express / GMC Savana 4.3L, 4.8L, 5.3L, 6.0L, Avalanche 81L, Suburban / Yukon 6.0L, 81L.

**Bosch 100-150 Amp. I/R Alternators.**

**ALTERNATOR #S:** 0-124-325-121, -133, -152, -153, -154, -164, -195, -217; AL8787X, AL8789X.

**LESTER #S:** 11073, 11076.

**DIMENSIONS:** Rotor D - 93.2 mm, Core L - 51.0 mm, Shaft L - 152.0 mm, DE Shaft D - 170 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17170 12V**

**REPLACES:** 1-124-035-239, 1-124-035-217.

**APPLICATIONS:** Porsche 911 Series 3.2L, 3.3L, 3.6L.

**Bosch 115 Amp. I/R Alternators.**

**ALTERNATOR #S:** 0-120-468-029, -101, -125;

AL176X, AL0710X.


**LESTER #S:** 13361.

**DIMENSIONS:** Rotor D - 103.0 mm, Core L - 54.2 mm, Shaft L - 256.0 mm, DE Shaft D - 170 mm, Slip Ring D - 276 mm, Threads - 16 mm-1.5.


**BOSCH**



**17171 12V**  
**REPLACES:** Chevrolet / GMC Trucks & Vans with 4.3L, 4.8L, 5.3L, 6.0L Engines.  
**Bosch 160 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-124-525-072, -104; AL8782X.  
**LESTER #S:** 11075.  
**DIMENSIONS:** Rotor D - 1034 mm, Core L - 56.6 mm, Shaft L - 157.0 mm, DE Shaft D - 17.0 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17172 12V**  
**REPLACES:** 1-124-035-537; VW: 078-903-213.  
**APPLICATIONS:** Audi A6 / S6 4.2L, A8 3.7L / 4.2L, S8 with 4.2L Engine, John Deere Farm Tractors.  
**Bosch 150 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-123-515-025, -500; 0-123-520-003, -004, -019, -020, -021, -026, -027, -029, -031; 0-124-515-503; AL0715X, AL0797X.  
**LESTER #S:** 11108, 12381, 13773, 13773B.  
**DIMENSIONS:** Rotor D - 111.7 mm, Core L - 604 mm, Shaft L - 168.8 mm, DE Shaft D - 15.7 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17174 12V**  
**REPLACES:** F00M-131-713.  
**APPLICATIONS:** Saab 9-3 2.0L / 2.3L, 9-5 2.3L / 3.0L.  
**Bosch 140 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-124-525-016, 0-124-525-143; AL0813X, AL0857X.  
**LESTER #S:** 11454, 13952.  
**DIMENSIONS:** Rotor D - 103.5 mm, Core L - 58.0 mm, Shaft L - 168.5 mm, DE Shaft D - 17 mm, Slip Ring D - 15.5 mm, Poles - 6, Threads - 16 mm-1.5.



**17180**  
**ROTOR COIL BOBINE**  
**REPLACES:** F00M-289-400.  
**APPLICATIONS:** BMW 540, 740, X5 44L, 750iL 54L, X5 44L, X5 IS 4.6L, Range Rover HSE 44L.  
**Bosch 150 Amp. Watercooled Alternators.**  
**ALTERNATOR #S:** 0-122-0AA-IJ0, 0-122-468-015; AL0734X.  
**LESTER #S:** 13815.



**17181**  
**REPLACES:** 0-122-1AA-5W0.  
**APPLICATIONS:** BMW 540, 740, X5 44L, 750iL 54L, X5 44L, X5 IS 4.6L, Range Rover HSE 44L.  
**Bosch 150 Amp. Watercooled Alternators.**  
**ALTERNATOR #S:** 0-122-0AA-IJ0, 0-122-468-015; AL0734X.  
**LESTER #S:** 13815.  
**DIMENSIONS:** Core OD - 112.0 mm, Core L - 75.0 mm, Shaft L - 143.5 mm, DE Shaft L - 15.0 mm, DE Shaft D - 17.0 mm, SRE Shaft D - 17.0 mm, Threads - M16 - 1.5.



**17182**  
**ROTOR COIL BOBINE**  
**APPLICATIONS:** BMW 745i, 745iL 44L 2002-2004.  
**Bosch 180 Amp. Watercooled Alternators.**  
**ALTERNATOR #S:** 0-122-0AA-090; AL0838X.  
**LESTER #S:** 13976.



**17183**  
**REPLACES:** F-00M-322-000, -006, -010, -033, -055; Volkswagen: 03G-903-213B.  
**APPLICATIONS:** Audi A6 3.0L / 3.2L, Dodge Journey 2.0L Turbo, VW CC 3.2L / 3.6L, Passat 3.6L.  
**Bosch 180 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-121-715-003, -020, -022, -042, -047, -049, -050, -051, -071, -076 to -078, -080, -103, -120, -122, -142, -149, -150, -151, -171, -176, -177, -178, -180; AL0849X.  
**LESTER #S:** 11221, 11222, 11478, 11495, 11586, 20017.  
**DIMENSIONS:** Rotor D - 101.5 mm, Core L - 60.6 mm, Shaft L - 150.0 mm, DE Shaft D - 17 mm, Slip Ring D - 13.5 mm, Poles - 8, Threads - 16 mm-1.5.



**17184**  
**REPLACES:** F-00M-322-046, -047, -052; F00M-320-102; F00M-399-908.  
**APPLICATIONS:** BMW 3.0L, Mercedes 2.8L / 3.0L / 3.5L / 4.7L / 5.5L / 6.3L, Volvo S80 / XC90 44L.  
**Bosch 180-183 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-121-715-006, -007, -012, -014, -015, -016, -017, -018, -029, -032, -107, -112, -114, -115, -116, -117, -118, -129; AL0821X, AL0841X, AL0843X, AL0844X, AL0847X, AL0850X, AL062X.  
**LESTER #S:** 11220, 11223, 11301, 11302, 11303, 11307, 11362, 20036, 20446  
**DIMENSIONS:** Rotor D - 105.9 mm, Core L - 62.6 mm, Shaft L - 154.0 mm, DE Shaft D - 17 mm, Slip Ring D - 13.5 mm, Poles - 8, Threads - 16 mm-1.5.

**DELCO**



**17625 12V**  
**REPLACES:** 1989632; 10470297, 0633, 1478, 1658, 1945, 1947, 2287, 4093; 10495681, 10499985; D3172, D3173, D3174, D3177, D3178, D3181, 87.  
**APPLICATIONS:** Buick / Cadillac / Chevrolet / Pontiac, Oldsmobile, Chevrolet / GMC Trucks; Jeep Cherokee, Comanche, Wagoneer.  
**Delco CS130 105 Amp. IR/EF Alternators.**  
**ALTERNATOR #S:** 1101101, 107, 111, 124, 126, 127, 136, 138, 140, 141, 143, 145, 149, 151, 154, 158, 162, 167, 181, 184, 190, 227, 231, 246, 254, 255, 264, 271, 273, 275, 278, 292, 293, 310, 344, 461, 465, 466, 467, 475, 480, 500, 571, 577, 582, 583, 593, 595, 596, 599, 600, 601, 603, 605, 606, 608, 617, 618, 620, 621, 629, 633, 635 - 638, 642, 644, 645, 646, 647, 649, 650, 806, 807, 812, 814, 822, 832; 1102600, 601, 602, 603, 604, 607, 630, 631; 1105661, 665, 667, 670, 672, 678, 688, 694, 711, 715, 716, 720, 725; 10479802, 9808, 9814, 9874, 9883, 9893, 9895 - 9898, 9901, 9903, 9905, 9906, 9909 - 9913, 9922, 9937, 9938, 9954, 9962, 9963, 9969, 9974, 9976, 9989, 9993, 9997; 10480025, 0027, 0028, 0035, 0040, 0055, 0068, 0069, 0082, 0083 - 0090, 0092, 0093, 0094, 0097, 0099, 0104, 0114, 0115, 0127, 0134, 0136, 0137; 21022772.  
**LESTER #S:** 7801-3, -7, -11, 7802-3, -7, -11, 7803-7, 7804-11, 7820-3, -11, 7858-11, 7859-7, 7860-3, -7, -11, 7861-3, -7, -11, 7888-3, 7888-7, -11, 7902-11, 7910-3, 7914-11...  
**DIMENSIONS:** Rotor D - 961 mm, Core L - 524 mm, Shaft L - 149.6 mm, DE Shaft L - 49.0 mm, DE Shaft D - 17mm, SRE Shaft D - 10 mm, Threads - .669 - 20, Slip Ring D - 26.0 mm.



**DELCO**



**17632 12V**

**REPLACES:** 10475748, 10480546, 10484420, 10486544, 10486582, 10486588, 10486594, 10488937, 10492396, 19052295.

**APPLICATIONS:** Buick Regal, Chevrolet Lumina, Monte Carlo, Chevrolet / GMC Astro/ Safari Minivan, Oldsmobile Cutlass, Pontiac Bonneville, Grand Prix. **Delco CS130D 105 Amp. Alternators.**

**ALTERNATOR #'S:** 10437987, 10437988, 10447094, 10447095, 10447096, 10447097, 10449257, 10463390, 10463405, 10463406, 10463407, 10463408, 10463412, 10463440, 10463443, 10463605, 10463630, 10463631, 10463632, 10463638, 10463639, 10463651, 10463652, 10463653, 10463654, 10463685, 10463688, 10463690, 10463838, 10463839, 10463840, 10463842, 10463843, 10463884, 10463940, 10463963, 10463964, 10463965, 10463966, 10464065, 10464066, 10464067, 10464069, 10464070, 10464071, 10464072, 10464073, 10464074, 10464075, 10464084, 10464085, 10464086, 10464087, 10464090, 10464097, 10464401, 10464402, 10464407, 10464409, 10464410, 10464411, 10464412, 10464413, 10464414, 10464415, 10464416, 10464417, 10464418, 10464419, 10464420, 10464423, 10464424, 10464425, 10464427, 10464429, 10464429, 10464431, 10464432, 10464433, 10464437, 10464447, 10464448, 10464449, 10464450, 10464457, 10464462, 10464465, 10464484, 10479881, 10479981, 10479984, 10480017, 10480043, 10480052, 10480065, 10480071, 10480072, 10480074, 10480076, 10480078, 10480079, 10480119, 10480167, 10480168, 10480170, 10480182, 10480184, 10480187, 10480188, 10480189, 10480190, 10480191, 10480195, 10480196, 10480198, 10480207, 10480217, 10480218, 10480228, 10480233, 10480235, 10480236, 10480237, 10480238, 10480240, 10480250, 10480251, 10480252, 10480254, 10480259, 10480260, 10480262, 10480263, 10480264, 10480288, 10480289, 10480292, 10480299, 10480301, 10480307, 10480308, 10480317, 10480318, 10480320, 10480321, 10480322, 10480330, 10480331, 10480332, 10480336, 10480342, 10480343, 10480346, 10480348, 10480351, 10480352, 10480353, 10480354, 10480361, 10480362, 10480378, 10480453, 10480497.

**LESTER #'S:** 8155-3, 8156-3, 8158-5, 8159-11, 8160-11, 8160-5, 8160-7, 8190-11, 8197-7, 8199-2, 8200-11, 8206-5, 8208-2, 8216-5, 8220, 8222-3, 8223-7, 8224-11, 8227-5, 8228-7, 8229-7, 8230-7, 8231-5, 8233-7, 8234-5, 8240-7, 8242-5, 8243-5, 8246-5, 8249-7, 8270-7, 8271-7, 8272-11, 8275-2, 8276-7, 8279, 8283, 8296, 8490-3.

**DIMENSIONS:** Rotor D - 95.9 mm, Core L - 524 mm, Shaft L - 148.7 mm, DE Shaft L - 48.0 mm, DE Shaft D - 17mm, SRE Shaft D - 15 mm, Threads - .669 - 20, Slip Ring D - 14.3 mm.



**17633 12V**

**REPLACES:** 10475523.

**APPLICATIONS:** Isuzu Amigo, Rodeo w/ 2.2L Engine. **European Delco CS130D IR/IF 100 Amp. Alternators.**

**ALTERNATOR #'S:** 10479944, 10479923, 3493814, 3493823; Isuzu: 810479-923-0.

**LESTER #'S:** 8239.

**DIMENSIONS:** Rotor D - 95.9 mm; Rotor Th. - 5245 mm; Shaft L - 153.0 mm; Shaft D - 16.99 mm.

**FORD**



**17675 12V**

**REPLACES:** F3DU-10335-AA.


**APPLICATIONS:** Ford Aerostar, Bronco, Crown Victoria, E-Series Van, Escort, Explorer, F-Series Pickup, Ranger, Taurus, Thunderbird; Ford Trucks w/ ZOL Engine; Lincoln Town Car; Mercury Cougar, Grand Marquis, Tempo, Topaz, Tracer; Mazda Navajo. **Ford 3G Series IR/IF 95 Amp. Alternators.**

**ALTERNATOR #'S:** 1024864, 1L5U-10300-BA, -BB, 1L5Z10346-BA, 6729337, 7066376, 7308195, 93BB-10300-FD, -FE, -FF, 97BB-10300-BA, -BB, 97BB-10300-BC, -BD, E9DF10300-CA, -10346-AA, E9DZ10346-B, E9PU-10346-AA, F07F10300-AA, F07U-10300-AA; AB, -AC, -10346-AC, F0CF10300-AA, F0CO-10300-AD, F0CU-10300-AA, F0CU-10300-AB, -AC, -AD, F0CU-10346-A, -AC, F0CZ10346-A, F0CZ10346-C, F0DF10300-AA, F0DU-10300-AA, -AB, -AC, -BA, F0DZ10346-A, -D, F0PU-10346-BD, -CA, -DA, -DD, -MC, -NC, F0VF10300-AA, F0VU-10300-AA, -AB, -AC, F0VY-10346-A, -B, F13U-10300-AC, -AD, F13Z10346-A, F17U-10300-AA, FIHT-10300-AA, FIHT-10300-AB, -AC, F1PU-10346-AC, -CA, -DA, FISU-10300-AC, FISU-10300-AD, FISU-10300-BA, FISZ10346-A, FITZ10346-B, -C, F1VU-10300-BB, F1VU-10300-BC, F1VU-10346-AD, F1VY-10346-A; F1VY-10346-B, F23U-10300-CA, F23U-10300-DA, F23Z10346-A, F29U-10300-AB, F2HZ10346-B, F2PU-10346-ED, -FC, -GA, F2UU-10300-CD, -EA, -CD, F2UZ10346-C, F3CU-10300-AD, F3HT-10300-GB, F3VU-10300-AA, F57U-10300-AA, F57U-10300-BA, F5HT-10300-AA, -CA, -DA, F5HZ10346-D, F5PU-10300-GA, F5PZ10346-GA, F65U-10300-EA, F67U-10300-AA, F67U-10300-BA, F69U-10300-AA, F6HT-10300-LA, F6HU-10300-AA, F6PU-10300-TA, F6PU-10300-UA, -KA, -UA, F6PZ10346-HA, -KA, F6PZ10346-LA, -PA, -RA, -UA, F6UU-10300-AA, F6UU-10300-BA, F6UZ10346-SA, F77U-10300-BA, F77U-10300-BB, F7CU-10300-AB, F7CU-10300-CB, F7CU-10300-DA, F7CZ10346-CB, F7PU-10300JA, F7PU-10346-CB, F7PU-10346JA, F7PZ10346JA, F7UU-10300-AB, XC3U-10300-DB, -DC.

**LESTER #'S:** 20150, 7749-11, 7749-3, 7750, 7751, 7753, 7755-11, 7760, 7785-3, 7790, 7793, 7794, 8258.

**DIMENSIONS:** Rotor D - 98.9 mm, Core L - 53.7 mm; Shaft L - 153.8 mm; Shaft D - 16.99 mm; Shaft Thread - .668 - 20.

**HITACHI**



**17503 12V**

**REPLACES:** L170G-9100.


**APPLICATIONS:** Chevrolet / GMC Heavy Duty Trucks, Isuzu Heavy Duty Trucks 3.9L Diesel.

**Hitachi 70 Amp. EF/IR Pump Drive Alternators.**

**ALTERNATOR #'S:** LR170-418, LR170-418B, LR170-418C.

**LESTER #'S:** 12097.

**DIMENSIONS:** Rotor D - 1034 mm, Core L - 49.2 mm, Shaft L - 2154 mm, DE Shaft L - 65.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 35.0 mm, Splines - 8, Threads - 16 mm-1.5, Poles - 6.



**17501 12V**

**REPLACES:** L160-31007; L170G-1100, -51001, -41001; L170-81002; Nissan: 23108-V7200, -54A00.


**APPLICATIONS:** Chevrolet / GMC Heavy Duty Trucks, Isuzu Heavy Duty Trucks 3.9L Diesel, Nissan Sentra Diesel.

**Hitachi 70 Amp. EF/IR Alternators.**

**ALTERNATOR #'S:** LR170-401, -402, A, B, C, -F -404, -404B, -404C, -410, -421, -421B, -424, -424B.

**LESTER #'S:** 14735, 14753, 20192.

**DIMENSIONS:** Rotor D - 103.3 mm, Core L - 491 mm, Shaft L - 193.5 mm, DE Shaft L - 55.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 35.0 mm, Splines - 16, Threads - 16 mm-1.5, Poles - 6.



**17504 12V**

**REPLACES:** L170-41002, L180-11001, L190G-5100; Nissan: 23108-12G01, -64J00, -65F00.

**APPLICATIONS:** Infiniti G20, Mazda Miata, Nissan Altima, Frontier, Pathfinder, Xterra, 240SX, Subaru Legacy.

**Hitachi 70-100 Amp. Alternators.**

**ALTERNATOR #'S:** LR170-732B, -732C, -734, -734B, -739, -739B, -744, -745, -752, -752B, -758; LR180-719, -725, -725B, -725C, -725E, -729, -730, -731B, -731C, -733, -733B, -734, -734B, -734C, -735, -736, -736B, -737B, -737C, -738, -739, -741, -741H, -741S, -742, -743, -744, -746, -751, -756B; LR185-701, -701H, -702; LR190-715B, -715C, -715E, -716, -716B, -717, -718, -718B, -719, -720, -720B, -722B, -724, -725B, -728, -729, -737, -737B, -737E, -744; L1100-709, -709B, -709C.

**LESTER #'S:** 11010, 11027, 13273, 13275, 13285, 13327, 13329, 13333, 13474, 13533, 13534, 13535, 13636, 13638, 13640, 13641, 13642, 13643, 13645, 13713, 13728, 13760, 13778, 13789, 13825, 13827, 13829, 13895, 13935, 13936.

**DIMENSIONS:** Rotor D - 97.9 mm, Core L - 42.2 mm, Shaft L - 143.3 mm, DE Shaft L - 45.3 mm, DE Shaft D - 17.0 mm, SRE Shaft D - 10.0 mm, Slip Ring D - 26.7 mm, Threads - 16 mm-1.5.



**17505 12V**

**REPLACES:** L1110G-2100; Nissan: 23108-31U00.

**APPLICATIONS:** Infiniti I30/ M30/ Q45 (VH41DE)/ QX4 (VG33E), Nissan Maxima (VQ30DE) w/ AT.

**Hitachi 100 - 110 Amp. Alternators.**

**ALTERNATOR #'S:** LR1100-703, -703B, -704, -704B, -704E, -705, -711, -711B, -712, -716, -716C; LR1110-705, -705B, -706B, -706C, -707, -707C, -707E, -707F, -707G, -709, -709B, -710B, -720, -723, -729C, -731.

**LESTER #'S:** 13639, 13657, 13712, 13724, 13826.

**DIMENSIONS:** Rotor D - 107# mm, Core L - 56.0 mm, Shaft L - 143.3 mm, DE Shaft L - 45.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 26.7 mm, Threads - 16-1.5.

**HITACHI**



**17506 12V**

**REPLACES:** L1125G-2100; Isuzu: 84203700; Nissan: 23108-40U00.

**APPLICATIONS:** Infiniti I30 / Nissan Maxima. Hitachi 125 Amp. Alternators.

**ALTERNATOR #S:** LR1125-702, -702B, -702F, -704, -704B, -704C, -704H.

**LESTER #S:** 13612.

**DIMENSIONS:** Rotor D - 107<sup>mm</sup>, Core L - 576 mm, Shaft L - 149.2 mm, DE Shaft L - 45.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 26.5 mm, Threads - 16 -1.5.



**17507 12V**

**REPLACES:** L160-41009, L170-51002, L170G-71001; Isuzu: 8-97074-931-0; Nissan: 23108-0M000.

**APPLICATIONS:** Honda Passport / Isuzu Rodeo, Nissan D21 Pickup, Xterra / Frontier, 200SX, NX, Sentra. Hitachi 60-70 Amp. IR/IF Alternators.

**ALTERNATOR #S:** LR160-723, -723B, -724, -725, -726, -726B, -727, -729C, -730, -730C, -731; LR170-738, -738B, -738C, -738E, -742, -743, -746E, -746F, -748, -748B, -755, -757B.

**LESTER #S:** 13287, 13334, 13531, 13564, 13637, 13644, 13744, 13745, 13757, 13775, 13778, 14859, 14960.

**DIMENSIONS:** Rotor D - 98.0 mm, Core L - 49.0 mm, Shaft L - 143.5 mm, DE Shaft L - 47.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 26.7 mm, Threads - 16 mm -1.5.



**17508 12V**

**REPLACES:** L165-2100; Subaru: 23708-AA020.

**APPLICATIONS:** Honda Passport, Isuzu Amigo-Rodeo-Trooper, Nissan Pulsar/Sentra, Subaru XT Coupe. Hitachi 50-65 Amp. IF Alternators.

**ALTERNATOR #S:** LR150-704, -704H; LR160-718, -718H; LR165-704, -704B, -705, -707, -707B, -708; Valeo: TA000B43001Z.

**LESTER #S:** 13250, 13564, 14719, 14743, 14859, 14960.

**DIMENSIONS:** Rotor D - 90.7 mm, Core L - 51.3 mm, Shaft L - 143.1 mm, DE Shaft L - 48.0 mm, DE Shaft D - 17.0 mm, SRE Shaft D - 10.0 mm, Slip Ring D - 26.7 mm, Threads - 16 mm -1.5.

**LEECE NEVILLE**



**17601 12V**

**REPLACES:** 100199, 79045; Ford: GM459.

**APPLICATIONS:** Caterpillar Engines, Cummins Engines, Dodge HD Trucks, Ford HD Trucks, Freightliner Trucks, IHC Trucks, Kenworth, Mack, Peterbilt Trucks, Volvo Trucks, Western Star Trucks, White Trucks. Leece-Neville 90-105 Amp. 2500 - 2600JB Series Alternators.

**ALTERNATOR #S:** 2500J, 2500JB, 2526J, 2600J, 2670J, 2670JB, A0012670JB, RJ2526, RJ2670.

**LESTER #S:** 7608, 7611.

**DIMENSIONS:** Rotor D - 120.9 mm, Core L - 61.75 mm, Shaft L - 235.2 mm, DE Shaft L - 96.0 mm, DE Shaft D - 25 mm, SRE Shaft D - 17 mm, Slip Ring D - 28.5 mm, Threads - 5/8 - 18.



**17602 12V**

**REPLACES:** 79192.

**APPLICATIONS:** Caterpillar Engines, Cummins Engines, Dodge HD Trucks, Ford HD Trucks, Freightliner Trucks, IHC Trucks, Peterbilt Trucks, Volvo Trucks, Western Star Heavy Duty Trucks. Leece-Neville 130-160 Amp. 2700 - 2800JB Series Alternators.

**ALTERNATOR #S:** 2700, 2700J, 2700JB, 2800J, 2800JB, 2805J, 2805JB, 90743, A001090743.

**LESTER #S:** 7612, 7613, 7614.

**DIMENSIONS:** Rotor D - 120.9 mm, Core L - 61.75 mm, Shaft L - 235.2 mm, DE Shaft L - 96.0 mm, DE Shaft D - 25 mm, SRE Shaft D - 17 mm, Slip Ring D - 28.5 mm, Threads - 5/8 - 18.



**17603 12V**

**REPLACES:** 95022, 79397; Ford: GM466.


**APPLICATIONS:** Ford Heavy Duty Ambulance, Ford E-Series Vans, F-Series Pickups. Leece-Neville 130-165 Amp. 7700JA Series Alternators.

**ALTERNATOR #S:** 5522A, 5522AA, 5523A, 5523AA, 7705, 7705A, 7705AA, 7705J, 7705JA, 7706A, 7706J, 7707JA, A0015522AA.

**LESTER #S:** 7640, 7708, 7763, 7767, 8330, 8331.

**DIMENSIONS:** Rotor D - 121.0 mm, Core L - 61.24 mm, Shaft L - 181.5 mm, DE Shaft L - 66.0 mm, DE Shaft D - 20 mm, SRE Shaft D - 17 mm, Slip Ring D - 23.0 mm, Threads - 1/2 - 20.

**LUCAS**



**17402 12V**


**REPLACES:** 54200042, 54200067, 54202067, 54219942; UDB100.

**APPLICATIONS:** Aveling Barford, Barber Greene, Case, Bedford, Ford, Iveco-Ford, Jaguar, Jensen, Land Rover, Leyland, Lotus, Marshall Tractors, Massey Ferguson Tractors, Morgan, Morris, New Holland, Reliant, Rover, TVR, Vauxhall. Lucas 43 Amp. 17/ 18 ACR Type Alternators.

**ALTERNATOR #S:** 23591A/E, 92A/E, 93A/E, 98A, B; 23600A/B, 10A, 11A, 15A/E, 16A/D, 17A, 18A/E, 19A/D, 22A/B, 24A/B, 26A/B, 27A/B, 42A/B, 43A/B, 44A/B, 45A/B, 46A/B, 47B/D, 48A/B, 49A/B, 50A/B, 51A, 52A/B, 53A/B, 54A/B, 55A/B, 56A/B, 58A/B, 60A/B, 64A/B, 65A/B, 66A/B, 73A/B, 74A/B, 77B, 79A/D, 91A/B, 92A/B, 93A/E, 95A/D, 97A/D; 23702A/E, 03A/B, 04A/B, 07A/B, 08A/B, 09A/D, 12A, 18A/D, 19A/D, 21A, 25A, 26A, 29A/B, 30A/B, 31A, 35A/B, 36A/B, 37A/D, 38A/D, 39A/B, 40A/B, 42A, 43A/B, 45A, 46A, 48A/E, 51A/D, 53A/B, 54A/B, 55A, 56A/D, 58A/B, 59A/D, 60A/D, 61A/B, 62A/B, 65A/B, 66A/B, 68A/B, 71A/B, 73A/B, 74A/D, 75A/D, 77A/B, 79A/D, 94A/D, 96A/D; 23801A/B, 02A/B, 05A/E, 06A/B, 07A/B, 08A/F, 09A/B, 10A/B, 11A/D, 14A/E, 18A/D, 19A/B, 22A/B, 23A/B, 24A/B, 25A/B, 28A/D, 30A/B, 32A/B, 39A/B, 41A, 42A, 43A/D, 45A/B, 48A, 49A, 50A, 53A, 54A, 57A, 60A, 72A, 73A, 78A, 89A, 90A, 91A, 92A, 93A, 96A; 23904A, 05A, 06A, 11A, 12A, 13A, 18A, 19A, 20A/B, 21A, 22A, 23A, 24A, 25A, 26A, 27A, 28A, 29A/D, 43A, 44A, 45A, 46A, 47A, 48A, 49A, 50A, 61A, 62A, 63A, 87A/F, 88A/B, 90A, 91A, 92A, 93A, 94A/B; 24014A, 240019A, 24140A.

**LESTER #S:** 14019, 14022, 14029, 14030, 14050, 14088.

**DIMENSIONS:** Rotor D - 83.0 mm, Core L - 53.0 mm, Shaft L - 155.5 mm, DE Shaft L - 60.3 mm, DE Shaft D - 15 mm, SRE Shaft D - 15 mm, Bearing - 6202, Threads - 14 mm -1.5.



**17403 12V**

**REPLACES:** 54203205, 54204046; UFB106, UFB109.

**APPLICATIONS:** Carbodies, Case, Ford Imports, Ford New Holland, Iveco-Ford, Jaguar, Land Rover, Range Rover, Rover, Morgan, TVR.

Lucas 55-75 Amp. A133 Alternators.

**ALTERNATOR #S:** 23970A/B, 71A; 24011A/B, 49A/B, 53A/F, 55A/B, 56A/B, 69A/D, 70A/D, 91A, 92A, 93A/B; 24100A/E, 01A/E, 02A/E, 10A, 25A/D, 26B, 27B, 29B/E, 42A/B, 46A, 51A, 52A, 54A, 55A, 64A/B, 66A, 73A, 76A, 86A/B, 94A, 97A; 24201A.

**LESTER #S:** 12142, 13145, 13146, 13163, 13175, 14031, 14056, 14092, 14561.


**DIMENSIONS:** Rotor D - 97.3 mm, Core L - 53.7 mm, Shaft L - 160.2 mm, DE Shaft L - 60.3 mm, DE Shaft D - 15 mm, SRE Shaft D - 15 mm, Slip Ring D - 25 mm, Threads - 14 mm -1.5.

**LUCAS**



**17404 12V**

**REPLACES:** 54206100, 54205975; UEB100, UEB102.  
**APPLICATIONS:** Austin, DAF, Fiat, Ford Imports, Ford New Holland, Land Rover, LDV, Massey Ferguson, Reliant, Rover. **Lucas 45-65 Amp. A127 Type Alternators.**  
**ALTERNATOR #S:** 24145A/D, 56A/D, 57A/D, 58A/D, 69A/E, 98A/B, 99A/B; 24200A, 03A, 08A/B, 13A, 14A, 15A, 36, 46A, 56A/C, 60A, 61A, 62A, 71A, 72, 73A, 76A, 77A, 78A, 95A, 96A, 98A; 24318A, 27A, 32A.  
**LESTER #S:** 12045, 12046, 12072, 12074, 12089, 12090, 12092, 12093, 12144, 12239, 12291.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 49.3 mm, Shaft L - 14344 mm, DE Shaft L - 53.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 26.0 mm, Threads - Special.




**17405 12V**

**REPLACES:** 54205301, 54206600, 54206860; UEB104.  
**APPLICATIONS:** Ford Farm Tractors, Ford Industrial Backhoes, Massey Ferguson Tractors. **Lucas A127 55-75 Amp. Alternators.**  
**ALTERNATOR #S:** 24188A/C, 24274D, 24294B, 24316A; 540 221 30, 540 222 20, 540 223 37D, 540 223 73, 540 223 82, 540 223 83, 540 223 95, 540 224 08A, 540 224 25, 540 225 28; Marelli: 633 241 88, 633 242 74, 633 242 94, 633 243 16.  
**LESTER #S:** 12088, 12091.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 49.8 mm, Shaft L - 202.0 mm, DE Shaft L - 53.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 26.0 mm, Splines - 18.


**17406 12V**  
**55 AMP VERSION OF 17404**

**MAGNETON**



**17640 14V**

**REPLACES:** 0135141.  
**APPLICATIONS:** Deutz, John Deere, Ingersoll Rand. **Magneton 50/ 55 Amp. Alternators.**  
**ALTERNATOR #S:** 443-113-515-050, -051, -100, -102, -220, -230, -260, -271, -291, -400, -404, -405, -410, -411, -414, -415, -421, -491, -620, -781; 443-113-516 -050, -051, -060, -061, -241, -381, -614, -660, -661, -662, -696, -700, -701, -704, -709, -711, -714, -720, -721, -765.  
**LESTER #S:** 12130, 12140.  
**DIMENSIONS:** Rotor D - 88.36 mm, Core L - 48.7 mm, Shaft L - 145.5 mm, DE Shaft L - 52.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 334 mm, Threads - 14 -1.5.



**17641 14V**

**REPLACES:** 0138.211.  
**APPLICATIONS:** Alaska Diesel, Atlas Copco, Denyo, Deutz, John Deere, Ingersoll Rand, Leroy. **Magneton 50-55 Amp. Alternators.**  
**ALTERNATOR #S:** 443-113-515-241, -461, -471, -501, -521, -530, -765; John Deere: RE506197  
**LESTER #S:** 12130.  
**DIMENSIONS:** Rotor D - 88.36 mm, Core L - 48.7 mm, Shaft L - 155.5 mm, DE Shaft L - 62.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 334 mm, Threads - 14 -1.5.  
**NOTE:** Same as 17640, except 17641 has longer Shaft, goes with Serpentine Pulley.

**MARELLI**



**17225**

**REPLACES:** 83614441, 85561401.  
**APPLICATIONS:** Ford Farm Tractors, New Holland. **Marelli A127im 12V / 100 Amp. Alternators.**  
**ALTERNATOR #S:** 63321229, 31, 32, 37, 41, 45; 63321310, 31, 43, 44, 45, 46, 47, 49, 91, 95; 63321401, 05, 18, 36, 62, 73, 85, 97; 63321800, 01, 03, 04; 63341343, 44, 45, 46, 47; MAN 786.  
**LESTER #S:** 12094, 12095.  
**DIMENSIONS:** Rotor D - 99.5 mm, Core L - 55.7 mm, Shaft L - 159.5 mm, DE Shaft L - 53.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 16.3 mm, Threads - Special.



**17226**

**REPLACES:** 85561941.  
**APPLICATIONS:** Land Rover Defender / Discovery / Range Rover w / 4.0L Engine. **Marelli A127im12V / 100 Amp. Alternators.**  
**ALTERNATOR #S:** 63321261; 63321321, 33, 52, 53, 54; 63341321, 33, 53, 54; MAN 829.  
**LESTER #S:** 13696, 13697, 13725, 13727.  
**DIMENSIONS:** Rotor D - 99.5 mm, Core L - 55.7 mm, Shaft L - 160.5 mm, DE Shaft L - 53.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 16.3 mm, Threads - Special.



**17235**

**REPLACES:** 85561931.  
**APPLICATIONS:** Range Rover w / 4.0L, 4.6L Engines. **Marelli A127im 12V / 120 Amp. Alternators.**  
**ALTERNATOR #S:** 63321240, 41; 63321321, 49; 63321507, 63321859, 63321939, 63341240, 63341321, 63377004; 63377463, 64, 90, 91, 92.  
**LESTER #S:** 12727, 12739, 13726, 21448, 21811, 23112, 23806, 23807, 23808.  
**DIMENSIONS:** Rotor D - 994 mm, Core L - 58.2 mm, Shaft L - 161.5 mm, DE Shaft L - 53.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 16.3 mm, Threads - Special.

**MANDO MELROE**



**17565**

**APPLICATIONS:** Hyundai Accent, Elantra, Tiburon. **Mando Melroe 12V / 90 Amp. Alternators.**  
**ALTERNATOR #S:** AB190058; Hyundai: 37300-22200; Valeo: TA000A14501; Bosch Reman.: AL4027X.  
**LESTER #S:** 13702.  
**DIMENSIONS:** Rotor D - 9942 mm, Core L - 52.7 mm, Shaft L - 1401 mm, DE Shaft L - 45.7 mm, DE Shaft D - 15 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 15 -1.5.

**MITSUBISHI**



**17500 12V**

**REPLACES:** A880T47668, 47670, 48170, 61870, 63370; Ford: F1CZ10335-C, F3Z210335-A; GME503, GME504; Mazda: B366-18-W35, B66S-18-W35.  
**APPLICATIONS:** Dodge Colt / Eagle Summit, Ford Escort, Probe, Mazda 626, MX-6, MX-3, Miata, Protege, Mitsubishi Expo LRV. **Mitsubishi 90 Amp. ER/IF Alternators.**  
**ALTERNATOR #S:** A2T05892, 05893, 09591, 13977, 17574, 18277, 18874, 19677, 19877, 19991, 20091, 20091ZC, 32899, 33191, 33991, 34477, 35177, 36391, 36392, 36578, 38291, 38391, 38491, 38891, 38892, 38977, 39291, 39391, 39891, 39991, 39992, 80391, 80591, 83491, 83591.  
**LESTER #S:** 13196, 13210, 13237, 13282, 13297, 13299, 13350, 13337, 13450, 13451, 13523, 13559, 13614, 13616, 13650, 13731.  
**DIMENSIONS:** Rotor D - 994 mm, Core L - 50.5 mm, Shaft L - 143.0 mm, DE Shaft L - 45.5 mm, DE Shaft D - 15 mm, SRE Shaft D - 8 mm, Slip Ring D - 23 mm, Threads - 15 mm -1.5.

**MITSUBISHI**



**17509 12V**

**REPLACES:** A880T59770, A880T64070, A880T67670; MD618630; Mazda: K801-18-WV35.  
**APPLICATIONS:** Ford Probe, Mazda 626, MX-6, RX-7, 929, Mitsubishi Montero 3.5L, 3000GT.  
**Mitsubishi 90 Amp. Alternators.**  
**ALTERNATOR #S:** A3T06791, 08491, 08591, 12391, 14491, 14591, 14891; A3TA0091, 0791, 2991; A3TB1791, 1891, 2491, 2492, 5291ZC, 6491; A3TG2291, A4T01893, A4T03091.  
**LESTER #S:** 11029, 11053, 11056, 11057, 13435, 13446, 13460, 13511, 13598, 13615, 13648, 13692, 13888.  
**DIMENSIONS:** Rotor D - 105.5 mm, Core L - 50.5 mm, Shaft L - 141 mm, DE Shaft L - 45.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 8 mm, Slip Ring D - 23 mm, Threads - 17 mm -1.5.



**17510 12V**

**REPLACES:** A880T42470, A880T46070, A880T57470, A880X46071; MD611579, MD611765, MD618303.  
**APPLICATIONS:** Ford Taurus, T-Bird, Tempo, Dodge Colt, Mitsubishi Montero / Dodge Raider.  
**Mitsubishi 90 Amp. IR/IF Alternators.**  
**ALTERNATOR #S:** A2T14972; A3T00792, 01496MA, 01496, 01498, 01596, 01595MA, 01598, 01598MA, 02193, 02198, 03392, 03393, 03493, 06591, 06691, 08293, 10598, 41876, 45693, 45694.  
**LESTER #S:** 12303, 13188, 13189, 13190, 13238, 13249, 13257, 13271, 13272, 13289, 13290.  
**DIMENSIONS:** Rotor D - 105.3 mm, Core L - 50.5 mm, Shaft L - 141 mm, DE Shaft L - 45.5 mm, DE Shaft D - 15 mm, SRE Shaft D - 8 mm, Slip Ring D - 23 mm, Threads - 15 mm -1.5.



**17511 12V**

**REPLACES:** A880T64470, A880X71370; Ford: F3XA-10335-AA; Nissan: 23108-0B00, 23108-1P113.  
**APPLICATIONS:** Ford Thunderbird / Mercury Cougar, Mercury Villager / Nissan Quest 3.0L, Dodge, Mack Freedom Series Trucks 2001-2003.  
**Mitsubishi 110-120 Amp. IR/IF Alternators.**  
**ALTERNATOR #S:** A3TA1091, 1091ZC; A3TB3991; A4T00790, 00796, 01192, 01192ZC, 02591, 02691, 02691A, 03591, 29591ZC, 30593; MD120365.  
**LESTER #S:** 12567, 13212, 13449, 13473.  
**DIMENSIONS:** Rotor D - 1121 mm, Core L - 49.0 mm, Shaft L - 143.0 mm, DE Shaft L - 45.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 23 mm, Threads - 17 mm -1.5.



**17515 12V**


**REPLACES:** A880T63570, A880X68970, MD618782; Nissan : 23108-0P610.  
**APPLICATIONS:** Dodge / Chrysler, Infiniti, Honda, Mitsubishi, Nissan.  
**Mitsubishi 90 Amp. ER/IF Alternators.**  
**ALTERNATOR #S:** A2T13894, 18792, 27594A, 27594T, 27993, 29594, 32899, 33191, 33191A, 33593, 33593A, 33593B, 33593C, 33891, 33892, 33991, 34692, 34692A, 34692B, 35791, 35792, 35792A, 35891, 35891A, 36991A, 37791A, 37891A, 38091, 38391, 39691, 39781, 40092, 81192, 81192ZC, 81291, 81291ZC, 81391, 81791, 81991, 82191, 82491, 82491A, 82791, 82791ZC, 82792, 82792ZC, 83491; A2TA0891, 0892, 0892ZC, 2191, 3791, 3991, 4091, 4091A, 4092A, 4991, 5191, 5192, 5391, 5392, 5393, 5393ZC, 7491, 7691; A2TB0091, 0191, 0491, 0491A, 0892, 1091A, 1091B, 1491, 1491ZC, 2391, 2791, 2791ZC, 2891, 2891ZC, 2991, 3891, 4691, 5791, 5791ZC, 5891, 5891AC, 5891ZC, 7391, 7591; A2TJ0391, 0391A, 0391B, 0391C, 0481, A2TJ0481ZC, A3TJ1181.  
**LESTER #S:** 11102, 11168, 11169, 11231, 13273, 13282, 13286, 13286, 13445, 13445, 13450, 13451, 13478, 13479, 13549, 13523, 13549, 13559, 13575, 13580, 13582, 13585, 13586, 13616, 13648, 13650, 13718, 13719, 13723, 13735, 13750, 13751, 13752, 13784, 13787, 13820, 13840, 13889, 13898, 13966, 21155.  
**DIMENSIONS:** Rotor D - 994 mm, Core L - 49.0 mm, Shaft L - 143.0 mm, DE Shaft L - 45.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 8 mm, Slip Ring D - 23 mm, Threads - 17 mm -1.5.

**NIPPONDENSO**




**17512 12V**

**REPLACES:** 021200-3880, 021200-3890, 021200-4330, 021200-4890, 021200-5030, 021200-7450.  
**APPLICATIONS:** Acura, Chrysler / Dodge / Plymouth, Dodge Trucks w/ 5.2-5.9L Diesel, Cummins Diesel, Ford Farm Tractors, Jaguar, Jeep, John Deere Tractors, Lexus, Mazda, Toyota, Volvo.  
**Nippondenso 120 Amp. IF Alternators.**  
**ALTERNATOR #S:** 100211-6030, -6031, -6050, -6051, -6060, -6110, -6150, -6170, -6190, -6300, -6320, -6350, -6360, -6370, -6390, -6410, -6420, -6440, -6450; 101211-7020, -7060, -7070, -7090, -7091, -7120, -7130, -7160, -7180, -7191, -7220, -7230, -7270, -7300, -7800; 102211-0500, -0610, -0650; 121000-4000, -4010, -4030, -4040, -4050, -4060, -4070, -4080, -4090, -4100, -4110, -4120, -4122, -4130, -4150, -4151, -4220, -4221, -4280, -4290, 4330, -4331, -4460, -4481, -4560; 421000-0100.  
**LESTER #S:** 11092, 11099, 12066, 12194, 12195, 13280, 13301, 13302, 13304, 13308, 13309, 13310, 13311, 13313, 13384, 13385, 13386, 13387, 13388, 13389, 13410, 13453, 13502, 13524, 13525, 13547, 13553, 13566, 13668, 13675, 13685, 13687, 13688, 13690, 13706, 13714, 13715, 13738, 13741, 13746, 13758, 13765, 13766, 13791, 13845, 13859, 13861, 13874, 13899, 13912, 13926, 13956, 13962.  
**DIMENSIONS:** Rotor D - 101.3 mm, Core L - 544 mm, Shaft L - 157.3 mm, DE Shaft L - 52.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 14 -1.5.




**17513 12V**

**REPLACES:** 021200-5940, 021200-7430, 021200-7651; Honda: 31101-P8FA01.  
**APPLICATIONS:** AGCO Spra, Allis Chalmers, Bobcat, Caterpillar Dozers, Chevrolet / GMC / Isuzu Trucks 7.8L, Chrysler / Dodge, Dodge Trucks 5.9L Diesel, 8.0L, Jeep 4.0L, John Deere, Land Rover 2.5L, Komatsu, Kubota, Perkins Engines.  
**Nippondenso 100-136 Amp. IF Alternators.**  
**ALTERNATOR #S:** 100211-4740, -6320, -6420, -6450; 101211-7400, -7551, -7630, -7633, -7670, -7780, -7810, -7811, -7812, 7840, -7850, -7851, -7880, -7892; 102211-0520, -0590, -0650, -0680, -0681, -0800, -0830, -0860, -3030, -3140; 121000-4160, -4161, -4170, -4210, -4211, -4220, -4221, -4231, -4232, -4233, -4270, -4280, -4290, -4291, -4300, -4330, -4331, -4332, -4350, -4351, -4360, -4372, -4373, -4450, -4451, -4460, -4470, -4481, -4490, -4491, -4520, -4530, -4550, -4551, -4580, -4590.  
**LESTER #S:** 11031, 11094, 11116, 11117, 12190, 12195, 12343, 12478, 12658, 12852, 12875, 13592, 13594, 13690, 13706, 13742, 13758, 13763, 13765, 13766, 13769, 13806, 13824, 13835, 13842, 13844, 13861, 13874, 13899, 13908, 13909, 13911, 13924, 13925, 13959, 13961, 13964, 23089.  
**DIMENSIONS:** Rotor D - 101.3 mm, Core L - 544 mm, Shaft L - 159.0 mm, DE Shaft L - 52.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 14 -1.5.



**17514 12V**


**APPLICATIONS:** Dodge Dakota / Durango, Jeep Grand Cherokee w/ 4.7L Engine, Liberty 3.7L.  
**Nippondenso 136 Amp. IF Alternators.**  
**ALTERNATOR #S:** 121000-4250, -4251, -4400, -4410, -4440, -4540.  
**LESTER #S:** 13790, 13873.  
**DIMENSIONS:** Rotor D - 101.3 mm, Core L - 544 mm, Shaft L - 159.0 mm, DE Shaft L - 52.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 14 -1.5.



**17552 12V**

**REPLACES:** 021200-3350.  
**APPLICATIONS:** Clarke Detroit Diesel Allison Fire Pump, John Deere Smal Diesel Tractors, Toyota Corolla.  
**Nippondenso 40-45 Amp. IF Alternators.**  
**ALTERNATOR #S:** 100211-1600, -1620, -4160, -4410, -4700, -4701; 101211-1090, -1130, -1131.  
**LESTER #S:** 12080, 12353, 12773, 22276.  
**DIMENSIONS:** Rotor D - 69.2 mm, Core L - 43.2 mm; Shaft L - 140.0 mm, Shaft D - 14.9 mm.

**NIPPONDENSO**



**17551 12V**

**REPLACES:** 021200-3520, 021200-3430;

Kubota: 15881-64041; Daihatsu: 6281-221-001-0; Ishikawajima: 18544-6240.

**APPLICATIONS:** Bobcat Wheel Tractor, Boss Lihgt Tower, Cab Cadet Tractors, Case Excavators, Daihatsu, Gehl Skid Steer, Hyster, Iseki Tractor, Isekinouki Diesel, Ishikawajima, KHD, Kubota Equipment, Komatsu Lift Trucks, Massey Ferguson Tractors, New Holland Excavators, Steiner Tractors, Thermo King Equipment, Toro, Toyota Lift Trucks, Yanmar Diesel.

**Nippondenso 40-45 Amp. IF Alternators.**

**ALTERNATOR #'S:** 100211-1610, -1630, -1632, -1640, -1660, -1661, -1662, -1670, -1680, -1690, -4390, -4440, -4460, -4490, -4520, -4530, -4531, -4540, -4610, -4621, -4630, -4631, -4640, -4650, -4670, -4680, -4690, -4730, -9230; 101211-1030, -1170, -1230, -1240, -1242, -1380, -2480, -3730, -3731.

**LESTER #'S:** 12179, 12180, 12187, 12188, 12189, 12190, 12197, 12198, 12199, 12202, 12206, 12207, 12270, 12356, 12530, 12653, 12659, 12772, 12807, 12855.

**DIMENSIONS:** Rotor D - 69.2 mm, Core L - 43.2 mm, Shaft L - 135.2 mm, DE Shaft L - 46.5 mm, DE Shaft D - 15 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 14 - 1.5.



**17553**

**APPLICATIONS:** Concord / Intrepid 2.7L, Dodge B Series Van, Durango / Dakota, Ram.

**Nippondenso 12V / 136 Amp. IF Alternators.**

**ALTERNATOR #'S:** 121000-4230, -4231, -4232, -4233, -4270, -4350, -4351, -4450, -4451, -4470.

**LESTER #'S:** 13763, 13824, 13842, 13911.

**DIMENSIONS:** Rotor D - 101.3 mm, Core L - 54.4 mm, Shaft L - 157.3 mm, DE Shaft L - 52.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 14 - 1.5.



**17555**

**APPLICATIONS:** Jeep Wrangler 2.5L / 4.0L.

**Nippondenso 12V / 81 Amp. IF Alternator.**

**ALTERNATOR #'S:** 121000-3610; Bosch: AL6542X.

**LESTER #'S:** 13834.

**DIMENSIONS:** Rotor D - 101.3 mm, Core L - 54.4 mm, Shaft L - 157.3 mm, DE Shaft L - 52.3 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 14 - 1.5.

**VALEO**



**17307**

**REPLACES:** 182171, 300696; Valeo: NC 092; Renault: 7701-030-151.

**APPLICATIONS:** Porsche 911, 924, 928, 930; Renault Fuego. **Paris Rhone 75-80 Amp. Alternators.**

**ALTERNATOR #'S:** A14N11, 12, 16, 25, 35, 38, 42, 49, 55, 59, 60, 62, 64, 74, 83, 84, 85, 86, 88, 89, 90, 91, 92, 93, 96, 97, 99, 101, 102, 120, 125, 128, 132, 134, 142, 150, 164, 171, 178; A14R25T, 26, 28, 35, 37, 42, 43, 45, 46.

**LESTER #'S:** 14420, 14583, 14584, 14594, 14602, 14608, 14894, 14895, 14900, 14955, 14957, 20592, 20593, 20813, 22197, 22201, 22920, 23601, 23602.

**DIMENSIONS:** Rotor D - 99.4 mm, Core L - 56.0 mm, Shaft L - 155.8 mm, DE Shaft L - 57.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 30 mm, Threads - 17 - 1.5.



**17309**

**REPLACES:** 300904; Valeo: NC 254.

**APPLICATIONS:** Porsche 911 with 3.2L / 3.3 L Engines.

**Paris Rhone 12V / 90 Amp. Alternator.**

**ALTERNATOR #'S:** A14N67; Bosch Reman: AL401N.

**LESTER #'S:** 14892.

**DIMENSIONS:** Rotor D - 99.38 mm, Core L - 59.3 mm, Shaft L - 168.0 mm, DE Shaft L - 68.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 30 mm, Threads - 17 - 1.5.



**17308**

**REPLACES:** 92964.

**APPLICATIONS:** BMW Marine, Renault Marine, Volvo Penta Marine. **Paris Rhone 12V / 45-50 Amp. Marine Alternators with IC Regulators.**

**ALTERNATOR #'S:** A13N1M, 2M, 28M, 147M, 148M, 149M, 186M; 2100606, 2518039, 518039.

**LESTER #'S:** 12412, 12420, 13068.

**DIMENSIONS:** Rotor D - 89.56 mm, Core L - 48.81 mm, Shaft L - 155.6 mm, DE Shaft L - 57.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 30 mm, Threads - 17 - 1.5.



**17316**

**REPLACES:** 182027.


**APPLICATIONS:** Porsche 924, 924S, 924 Turbo, 928.

**Paris Rhone 12V / 90 Amp. Alternator.**

**ALTERNATOR #'S:** A14N71; Porsche: 928-603-114-01.

**LESTER #'S:** 14602.

**DIMENSIONS:** Rotor D - 99.34 mm, Core L - 55.8 mm, Shaft L - 156.0 mm, DE Shaft L - 57.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 12 mm, Slip Ring D - 30 mm, Threads - 17 - 1.5.



**17317**

**REPLACES:** 300774, 182174; Valeo: 592727, NC 760, NC 762; Volvo: 864347.

**APPLICATIONS:** Michigan Loader L90, Renault Trucks, Volvo Excavators, Volvo Penta Marine.

**Paris Rhone 24V / 55-60 Amp. Marine & Industrial Alternators with IC Regulator.**

**ALTERNATOR #'S:** A14N30M, 43M, 44M, 47M, 81M, 100M, 110M, 112M, 115M, 116M, 118M, 119M, 122M, 137, 141M, 177M, 183, 196M, 198M, 200, 200M, 206M, 208M.

**LESTER #'S:** 12110, 12417, 12418, 12465, 14900.

**DIMENSIONS:** Rotor D - 99.42 mm, Core L - 55.5 mm, Shaft L - 168.8 mm, DE Shaft L - 57.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 17 mm, Slip Ring D - 30 mm, Threads - 17 - 1.5.



**17318**

**REPLACES:** 112-7, 71151203, 71152203.

**APPLICATIONS:** Case, Alfa-Romeo, Porsche 911 / 914, Renault, Saab 99 2.0L, Volvo 240 / 260 Series.

**S.E.V. 12V / 55 Amp. E/R Alternators.**

**ALTERNATOR #'S:** 71210702, 12302, 12602, 12702, 20402, 23502, 23702, 28902, 70402, 70802, 71002, 71102, 71302, 73702; 71312002, 14202; Bosch Reman.: AL35X, AL77X.

**LESTER #'S:** 13025, 14040, 14224, 14227, 14280, 14298, 14579.

**DIMENSIONS:** Rotor D - 881 mm, Core L - 47.74 mm, Shaft L - 144.3 mm, DE Shaft L - 56.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 39.3 mm, Threads - 16 - 1.0.



**17320 12V**

**REPLACES:** 593818.

**APPLICATIONS:** Audi 80, 100, A4, A6 2.8L; BMW 318i, 325D, 530i, 740, M3; Mercedes C Class 2.8L, E Class 3.2L; Bertone, Citroen, Opel, Peugeot, Renault, VW. **Valeo 80 - 115 Amp. IF Alternators.**

**ALTERNATOR #'S:** A13Vi10, 11, 13, 14, 16, 18, 20, 23, 24, 25, 28, 31, 34, 45, 46, 48, 49, 51, 52, 55, 59, 60, 61, 67, 70, 72, 76, 77, 82, 83; AL0152X, AL0161V, AL0707X, AL0744X, AL9361X, AL9370X.

**LESTER #'S:** 13464, 13469, 13661, 13662, 13663, 13709, 20244, 21260, 21261, 21297, 21324, 21325, 21803, 22337, 22448, 22486, 22516, 22520, 22526, 22744, 22765, 22777, 22782, 22784, 22801, 22852, 22979.

**DIMENSIONS:** Rotor D - 95.3 mm, Core L - 55.3 mm, Shaft L - 151.8 mm, DE Shaft L - 48.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 16 - 1.5.

**VALEO**




**17321 12V**

**REPLACES:** 593263.  
**APPLICATIONS:** Volvo Penta Marine Applications.  
**Paris Rhone 50 Amp. Alternator.**  
**ALTERNATOR #'S:** A13N259, A13N259M, 439181.  
**LESTER #'S:** 13059.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 476.1 mm,  
 Shaft L - 148.6 mm, DE Shaft L - 59.9 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 12 mm,  
 Slip Ring D - 29.2 mm, Threads - 17 - 1.5.



**17322 12V**

**REPLACES:** 593149.  
**APPLICATIONS:** Mercedes Gas & Diesel 300E, CE, TE;  
 C180, C200, C280; E200; E220; E280; E320; C250D.  
**Valeo 90 Amp. IF Alternators.**  
**ALTERNATOR #'S:** A13Vi99, 100, 134, 135, 198;  
 439008, 439244; Bosch: AL0161V.  
**LESTER #'S:** 13709.  
**DIMENSIONS:** Rotor D - 95.33 mm, Core L - 55.3 mm,  
 Shaft L - 152.1 mm, DE Shaft L - 48.0 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 15 mm,  
 Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17323 12V**

**REPLACES:** 592821, 592912.  
**APPLICATIONS:** VW Golf / Jetta 2.0L, Passat 1.9L  
 Diesel; Citroen, Peugeot.  
**Valeo 60-70 Amp. IF Alternators.**  
**ALTERNATOR #'S:** A11Vi11, 17, 18, 21, 22, 23, 25, 26,  
 29, 30; Bosch Reman.: AL0185V.  
**LESTER #'S:** 13655, 20902, 22781, 22787, 22791, 23676.  
**DIMENSIONS:** Rotor D - 89.2 mm, Core L - 53.3 mm,  
 Shaft L - 148.3 mm, DE Shaft L - 48.5 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 15 mm,  
 Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17326**

**REPLACES:** 591155, 593314.  
**APPLICATIONS:** Renault 2.2L Diesel, VW w/ AC.  
**Valeo 80 Amp. IF Alternator.**  
**ALTERNATOR #'S:** A13Vi66, 439019.  
**LESTER #'S:** 21205.  
**DIMENSIONS:** Rotor D - 95.3 mm, Core L - 55.3 mm,  
 Shaft L - 151.8 mm, DE Shaft L - 48.0 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 15 mm,  
 Slip Ring D - 14.5 mm, Threads - 16 - 1.5.




**17324**

**REPLACES:** 593146, 593150, 593151, 593152.  
**APPLICATIONS:** Audi A4, VW Corrado / Golf / Jetta /  
 Passat, Renault Industrial Engines, Toro Misc.  
 Equipment w / Peugeot Engines, Volvo 2.0L,  
 Citroen, Opel. **Valeo 70-80 Amp. IF Alternators.**  
**ALTERNATOR #'S:** A11Vi28, 31, 32, 35, 36, 40, 43, 44,  
 45, 46, 48, 49, 51, 52, 54, 55, 56, 57, 59, 61, 62, 64,  
 66, 67, 72, 76, 77, 79, 81, 85, 87, 89, 91, 92, 93, 94,  
 95, 96, 98, 99, 101, 102, 104, 105, 106, 108, 110,  
 111; Bosch Reman.: AL0185V, AL0186X.  
**LESTER #'S:** 12098, 13655, 13658, 20902, 20985, 21185,  
 21324, 21397, 21398, 21419, 21435, 21478, 21620,  
 21660, 21801, 22524, 22631, 22702, 22713, 22745,  
 22746, 22777, 22781, 22788, 22789, 22790, 22849,  
 22857, 22858, 22976, 23015, 23142, 23811.  
**DIMENSIONS:** Rotor D - 89.2 mm, Core L - 53.3 mm,  
 Shaft L - 148.5 mm, DE Shaft L - 48.5 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 15 mm,  
 Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17327**

**REPLACES:** 593145.  
**APPLICATIONS:** Mercedes Benz C280 / C320, Renault.  
**Valeo 70-110 Amp. IF Alternators.**  
**ALTERNATOR #'S:** A13Vi164, 169, 170, 175, 176, 220;  
 439016, 439095; Bosch: AL0161V.  
**LESTER #'S:** 13709, 21200.  
**DIMENSIONS:** Rotor D - 95.33 mm, Core L - 54.6 mm,  
 Shaft L - 152.1 mm, DE Shaft L - 48.0 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 15 mm,  
 Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17328**

**REPLACES:** 593149, 593153.  
**APPLICATIONS:** Audi A4 / Volkswagen Passat, Citroen,  
 Fiat, Peugeot. **Valeo 70-80 Amp. IF Alternators.**  
**ALTERNATOR #'S:** A13Vi68, 80, 81, 84, 85, 86, 87, 88,  
 95, 96, 102, 108, 109, 126, 137.  
**LESTER #'S:** 21252, 21330, 21803, 21908, 21921, 22307,  
 22443, 22448, 22571, 22765, 22783, 22784, 22865.  
**DIMENSIONS:** Rotor D - 95.33 mm, Core L - 54.6 mm,  
 Shaft L - 152.1 mm, DE Shaft L - 48.0 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 15 mm,  
 Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17330 12V**

**REPLACES:** 593340, 593147, 593158.  
**APPLICATIONS:** BMW 3 Series / M3 / Z3, Buick  
 Rendezvous / Pontiac Atzek 3AL, Hyundai Elantra  
 2.0L, Massey Ferguson w / Perkins Engine, VW  
 Golf / Passat, Volvo S40 / V40 1.9L, Land Rover,  
 Fiat, Peugeot, Renault Agricultural w / Deutz  
 Engine. **Valeo 95-120 Amp. IF Alternators.**  
**ALTERNATOR #'S:** A13Vi71, 94, 101, 118, 140, 141,  
 142, 180, 191, 200, 201, 204, 231, 233, 234, 242,  
 243, 244, 246, 258, 261, 263, 273, 274, 277, 279,  
 281, 283, 284, 287, 289, 293, 306; **SG10B018, 021,**  
**022, 023, 048; SG10S030, 038, 042; SG11B010;**  
 Bosch: AL0744X, AL8815X, AL9414X.  
**LESTER #'S:** 11002, 11122, 12421, 13458, 13469, 13621,  
 13865, 20508, 21333, 21439, 21440, 21469, 21493,  
 21494, 21909, 21920, 21922, 22447, 22710, 22872,  
 23017, 23163, 23164, 23250, 23814, 24078.  
**DIMENSIONS:** Rotor D - 95.33 mm, Core L - 54.6 mm,  
 Shaft L - 152.1 mm, DE Shaft L - 48.0 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 15 mm,  
 Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17331 12V**

**REPLACES:** 592370, 593270.  
**APPLICATIONS:** KHD R1011 Motor, Deutz Stationary  
 Engines, Volvo Penta Marine Engines.  
**Paris Rhone 60 Amp. Alternators.**  
**ALTERNATOR #'S:** A13N234, A13N271, A13N285M;  
 439067, 439185, 439190; Bosch: AL503IN.  
**LESTER #'S:** 12302, 12411.  
**DIMENSIONS:** Rotor D - 89.2 mm, Core L - 47.2 mm,  
 Shaft L - 151.3 mm, DE Shaft L - 61.8 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 17 mm,  
 Slip Ring D - 30 mm, Threads - 17 - 1.5.



**17332 12V**

**REPLACES:** 592832, 593298, 593321.  
**APPLICATIONS:** Alpine, Audi, BMW, Citroen, Mercedes,  
 Renault, VW, Volvo. **Valeo IF Alternators.**  
**ALTERNATOR #'S:** A13Vi17 21, 30, 32, 35, 40, 41, 44,  
 47, 57, 62, 63, 64, 65, 69, 73, 74, 75, 78, 97, 99, 100,  
 104, 105, 106, 107, 113, 114, 117, 119, 121, 122,  
 123, 124, 125, 126, 130, 131, 132, 134, 135, 137,  
 138, 139, 148, 149, 150, 153, 155, 156, 157, 163,  
 164, 167, 170, 173, 175, 176, 178, 185, 188, 195,  
 197, 198, 209, 210, 213, 216, 218, 222, 223, 237,  
 241, 253, 257, 264, 265, 267; AL0181X, AL0187X.  
**LESTER #'S:** 13355, 13458, 13630, 13656, 13664, 13709,  
 13814, 21201, 21252, 21290, 21298, 21465, 21466,  
 21780, 22337, 22450, 22519, 22587, 22713, 22715,  
 22720, 22778, 22819, 22850, 22853, 22865, 22871,  
 22890, 23016, 23120, 23188.  
**DIMENSIONS:** Rotor D - 95.7 mm, Core L - 56.0 mm,  
 Shaft L - 152.5 mm, DE Shaft L - 48.0 mm,  
 DE Shaft D - 17 mm, SRE Shaft D - 15 mm,  
 Slip Ring D - 14.5 mm, Threads - 16 - 1.5.

**VALEO**



**17334 12V**

**REPLACES:** 593146.  
**APPLICATIONS:** Toro Lawn Mowers, Citroen, Peugeot.  
**Valeo 70 Amp. I/R Alternators**  
**ALTERNATOR #S:** A11Vi32, 40, 43, 44, 45, 46, 48, 49, 51, 52, 55, 56, 57, 91, 99, 101, 102.  
**LESTER #S:** 12422, 20902, 20985, 21185, 21435, 21660, 22781, 22788, 22789, 23142, 23811.  
**DIMENSIONS:** Rotor D - 89.5 mm; Shaft L - 148.0 mm; Shaft D - 16.99 mm.



**17336 12V**

**REPLACES:** 2591007, 593273, 300846.  
**APPLICATIONS:** Case Rollers, Hatz Diesel, Jeep 21L Diesel, KHD Stationary Engines, Peugeot, Porsche 911, Renault, Toro Lawn Mower.  
**Paris Rhone 50-55 Amp. Alternators.**  
**ALTERNATOR#S:** A13N 46, 49, 50, 52, 91, 107, 117, 123, 129, 175, 215, 281; Bosch: AL21X, AL582X.  
**LESTER #S:** 12049, 13208, 14978, 20167, 20773, 22349, 22473, 23811.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 47.2 mm, Shaft L - 149.4 mm, DE Shaft L - 59.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 28.8 mm, Threads - 17 - 1.5.



**17337 12V**

**REPLACES:** 2590561, 590561.  
**APPLICATIONS:** KHD Stationary Engines.  
**Paris Rhone 12V / 60 Amp. Alternator.**  
**ALTERNATOR#S:** A13N165; 592769; Bosch: AL5030N.  
**LESTER #S:** 12301.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 47.6 mm, Shaft L - 149.2 mm, DE Shaft L - 59.4 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 28.8 mm, Threads - 17 - 1.5.



**17338 12V**

**REPLACES:** 2523900, 592812.  
**APPLICATIONS:** Carrier Refrigeration Units.  
**Paris Rhone 12V / 60 Amp. Alternators.**  
**ALTERNATOR#S:** A13N237, A13N293; 439186, 439243.  
**LESTER #S:** 12413, 12460.  
**DIMENSIONS:** Rotor D - 89.4 mm, Core L - 46.9 mm, Shaft L - 145.2 mm, DE Shaft L - 55.8 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 28.8 mm, Threads - 17 - 1.5.



**17339**

**REPLACES:** 2590878, 593265.  
**APPLICATIONS:** Deutz Type K220 Engine, KHD R1011 Engine, Vermeer 672 Stump Grinder.  
**Paris Rhone 12V / 60 Amp. Alternator.**  
**ALTERNATOR #S:** A13N255; 2541659; 592769.  
**LESTER #S:** 12301.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 47.6 mm, Shaft L - 151 mm, DE Shaft L - 61.7 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 28.8 mm, Threads - 17 - 1.5.



**17340**

**REPLACES:** 2590879, 593266.  
**APPLICATIONS:** KHD Industrial Engines.  
**Paris Rhone 28V / 40 Amp. Alternator.**  
**ALTERNATOR #S:** A13N257, 439101.  
**LESTER #S:** 12710.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 46.9 mm, Shaft L - 151 mm, DE Shaft L - 61.6 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 28.8 mm, Threads - 17 - 1.5.



**17341**

**REPLACES:** 2590882, 593267.  
**APPLICATIONS:** KHD FL1011 Industrial Engine.  
**Paris Rhone 12V / 80 Amp. Alternator.**  
**ALTERNATOR #S:** A13N258; 2541662.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 50.7 mm, Shaft L - 154.5 mm, DE Shaft L - 61.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 28.8 mm, Threads - 17 - 1.5.




**17342**

**REPLACES:** 2590960, 593271.  
**APPLICATIONS:** KHD Industrial Engines.  
**Paris Rhone 24V / 40 Amp. Alternator.**  
**ALTERNATOR #S:** A13N272, 2541708, 439191.  
**LESTER #S:** 12710.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 47 mm, Shaft L - 150.7 mm, DE Shaft L - 61.7 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 28.8 mm, Threads - 17 - 1.5.



**17343**

**REPLACES:** 2590962, 593272.  
**APPLICATIONS:** KHD Industrial Engines, Volvo L30B / L35B Construction Equipment.  
**Paris Rhone 12V / 80 Amp. Alternator.**  
**ALTERNATOR #S:** A13N273, 2541709, 439142.  
**LESTER #S:** 12713.  
**DIMENSIONS:** Rotor D - 89.5 mm, Core L - 51.8 mm, Shaft L - 155.3 mm, DE Shaft L - 62.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 10 mm, Slip Ring D - 28.8 mm, Threads - 17 - 1.5.



**17344**

**REPLACES:** 593576, 593996.  
**APPLICATIONS:** Hyundai Sonata 2.5L, 2.7L - Santa Fe 2.7L, Kia Optima 2.7L, Mercedes A-Class, Peugeot, Renault, Volkswagen Polo 1.2L.  
**Valeo 70-95 Amp. IR/IF Alternators.**  
**ALTERNATOR #S:** SG9B 025, 33, 035, 037, 038, 039, 047, 053, 057, 063, 064, 066, 067, 077, 079; TG9B024, 025, 026, 028; Bosch Reman.: AL4038X.  
**LESTER #S:** 13945, 20027, 21460, 21466, 21481, 22444, 22851, 22930, 22931, 23165, 23166, 23167, 23752, 23892, 23908, 23930, 24080.  
**DIMENSIONS:** Rotor D - 98.5 mm, Core L - 491 mm, Shaft L - 144.2 mm, DE Shaft L - 46.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17345**


**REPLACES:** 593325, 593800.  
**APPLICATIONS:** Audi A3, BMW 3 Series (N42), MCC Smart Forfour 1.5L, VW Golf / Polo 14L / Touran 1.6L, Ford Contour, Renault.  
**Valeo 100-120 Amp. IR/IF Alternators.**  
**ALTERNATOR #S:** SG10B010, 011, 019, 20, 031, 032, 035; SG11B010; TG11C010, 014, 015, 016, 017, 022, 036; TG12C013, 016.  
**LESTER #S:** 20506, 22966, 23012, 23049, 23204, 23250, 23293, 23350, 23355, 23357, 23362, 23874, 24002.  
**DIMENSIONS:** Rotor D - 98.5 mm, Core L - 491 mm, Shaft L - 144.2 mm, DE Shaft L - 46.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.

**VALEO**




**17346**

**REPLACES:** 593359.  
**APPLICATIONS:** Audi A4 1.8L, Citroen, Peugeot, VW Passat 1.8L Turbo, Rover Diesel.  
**Valeo 70 Amp. IR/IF Alternator.**  
**ALTERNATOR #’S:** A13Vi203, 236, 276, 278; SG8B010.  
**LESTER #’S:** 21437, 22929, 22972, 23114.  
**DIMENSIONS:** Rotor D - 98.5 mm, Core L - 491 mm, Shaft L - 144.2 mm, DE Shaft L - 46.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17347**

**REPLACES:** 593566, 593570.  
**APPLICATIONS:** Audi A4 - A6 - S4 - TT, VW Beetle - Passat, BMW M3 - 3 Series, Mercedes Class C - CLK - SLK - E 3.2L, AMG SLK320, Land Rover.  
**Valeo 12V / 120 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** SG12B010, 011, 015, 016, 018, 020, 021, 022, 023, 024, 025, 027, 028, 039, 040, 042, 047, 049, 050, 054, 055, 060, 062, 065, 071, 074, 075, 080, 082, 087, 090; SG12S019, SG14B017.  
**LESTER #’S:** 11208, 12424, 13928, 13931, 13932, 13947, 13974, 13990, 23234.  
**DIMENSIONS:** Rotor D - 105.3 mm, Core L - 54.0 mm, Shaft L - 149.2 mm, DE Shaft L - 53.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17349**

**REPLACES:** 593567, 593926.  
**APPLICATIONS:** Audi A3 - A4 - A6 - TT, Volkswagen Beetle - Golf - Jetta - Passat, BMW 525 - Z3 - Z4 (M54) - X5, Mercedes A - B Series.  
**Valeo 70-90 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** SG8B011, 013, 015, 016, 017, 018, 022, 023, 026, 027, 029; SG9B010, 011, 013, 015, 017, 018, 019, 023, 024, 027, 029, 040, 042, 048, 049, 050, 052, 054, 055, 057, 059, 069, 078, 079, 087, 088, 089, 095; Bosch Reman.: AL0188X, AL0716X, AL0732X, AL0800X, AL9366X, AL9405X.  
**LESTER #’S:** 11019, 11207, 13852, 13930, 13933, 13946, 13971, 21473, 21474, 21478, 21481, 21485, 21486, 21488, 22911, 22995, 22997, 23165, 23222, 23249, 23286, 23287, 23892, 23930.  
**DIMENSIONS:** Rotor D - 98.1 mm, Core L - 47.7 mm, Shaft L - 145.0 mm, DE Shaft L - 46.4 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17350**

**REPLACES:** 593568.  
**APPLICATIONS:** BMW 325i 2.5L, 330i, 530i, X5 3.0L, Land Rover Discovery 4.6L 2004, Nissan, Renault, Volvo S40 / V40 1.9L Turbo Diesel.  
**Valeo 120 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** SG12B017, 029, 044, 065, 082, 103; Bosch Reman.: AL0730X, AL9410X.  
**LESTER #’S:** 13970, 13990, 22990, 23175, 23233.  
**DIMENSIONS:** Core D - 105.6 mm, Core L - 53.8 mm, Shaft L - 151 mm, DE Shaft L - 46.4 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17351**

**REPLACES:** 593569.  
**APPLICATIONS:** Audi A3 1.9L Diesel - A4 1.8L - TT 1.8L, 3.2L - Allroad 2.7L, BMW X5 3.0L, VW Beetle 1.8L - Golf 1.9L Diesel.  
**Valeo 120-140 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** SG12B09, 030, 038, 052, 068, 072, 081, 097; SG14B010, 011, 012, 013, 016, 019, 020, 022; Bosch: AL0189X, AL0829X, AL9314X.  
**LESTER #’S:** 11098, 11159, 13947, 13928, 13931, 13932, 13947, 13974, 22990, 23059, 23256, 23323, 23837.  
**DIMENSIONS:** Rotor D - 105.3 mm, Core L - 56.0 mm, Shaft L - 148.3 mm, DE Shaft L - 46 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17352**

**REPLACES:** 593561.  
**APPLICATIONS:** Audi A3 2.0L - A4 1.8L, 1.9 TDi, 3.0L, BMW 1 Series - 3 Series - X3, Land Rover Freelander 2.0L, VW Passat 2.0L, Citroen, Peugeot.  
**Valeo 140-150 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** TG14C011, 012, 014, 015, 016; TG15C012, 015, 017, 018, 020, 022, 027, 028, 038, 043, 054, 058, 064, 065, 091; Bosch: AL0814X, AL0825X, AL0834X.  
**LESTER #’S:** 11070, 11149, 11161, 21338, 22970, 23227, 23301, 23347, 23370, 23795, 23890, 23891, 23914.  
**DIMENSIONS:** Rotor D - 104.0 mm, Core L - 47.7 mm, Shaft L - 150.8 mm, DE Shaft L - 53.4 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17355**

**REPLACES:** 593574.  
**APPLICATIONS:** Audi A3, VW Golf, Ford Contour.  
**Valeo 70 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** SG8B020, 021, 022; 439247, 439495.  
**LESTER #’S:** 21438, 22930, 23165.  
**DIMENSIONS:** Rotor D - 98.5 mm, Core L - 491 mm, Shaft L - 144.2 mm, DE Shaft L - 46.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17356**

**REPLACES:** 593798.  
**APPLICATIONS:** Dodge Sprinter, Jeep Grand Cherokee 3.0L Diesel, Mercedes GClass, EClass, R-Class 3.0L Diesel.  
**Valeo 170 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** TG17C028, 030, 030B; AL0843X.  
**LESTER #’S:** 11306.  
**DIMENSIONS:** Rotor D - 110.5 mm, Core L - 60.5 mm, Shaft L - 154.2 mm, DE Shaft L - 49.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17731**

**REPLACES:** 591108, 593340, 593147.  
**APPLICATIONS:** BMW 3 Series - M3 - Z3, Buick Rendezvous / Pontiac Aztek, Chevrolet Cavalier / Oldsmobile Alero / Pontiac Sunfire, Pontiac Grand Am, Chevrolet Venture / Oldsmobile Silhouette / Pontiac Montana, TransSport, Saturn Ion, Vue, Hyundai Elantra 2.0L, Massey Ferguson Tractors, Perkins Engines, Volvo 960 - S40 - V40, VW Golf 1.9L Diesel, Citroen, Fiat, Land Rover, Opel, Peugeot.  
**Valeo 105-120 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** A13Vi71, 94, 101, 118, 140, 141, 142, 151, 180, 191, 192, 193, 194, 200, 201, 204, 231, 233, 234, 242, 243, 244, 246, 258, 261, 263, 273, 274, 277, 279, 281, 283, 284, 287, 289, 293, 306, 308; SG10B018, 021, 022, 023, 048; SG10S028, 029, 030, 034, 035, 036, 038; SG11B010; TG10B013; AL0744X, AL8511X, AL8795X, AL8814X, AL8815X, AL9414X.  
**LESTER #’S:** 11002, 11122, 12421, 13469, 13720, 13865, 13944, 13993, 20508, 21333, 21439, 21440, 21469, 21493, 21494, 21804, 21909, 21920, 21922, 22447, 22872, 23017, 23209, 23250, 23264, 23814, 24079.  
**DIMENSIONS:** Rotor D - 98.5 mm, Core L - 491 mm, Shaft L - 144.2 mm, DE Shaft L - 46.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**VALEO**



**17732**

**REPLACES:** 2591014, 593274.  
**APPLICATIONS:** BMW 323/ 328/ 528/ Z3 w/ 2.8L, Chevrolet Corvette w/ 5.7L Engine.  
**Valeo 110-120 Amp. IF Alternators.**  
**ALTERNATOR #'S:** A14Vi10, 11, 13, 14, 18, 21, 22, 24, 28, 30, 31; S02AN00; GM: 10246634.  
**LESTER #'S:** 13721, 13846, 22740, 22955, 23753.  
**DIMENSIONS:** Rotor D - 110.3 mm; Rotor Th. - 60.9 mm; Shaft L - 151.8 mm; Shaft D - 1700mm.



**17751**

**REPLACES:** 2601637.  
**APPLICATIONS:** Chevrolet Corvette 5.7L 2002-2004.  
**Valeo 150 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG15C013, TG15C014.  
**LESTER #'S:** 13968, 13969.  
**DIMENSIONS:** Rotor D - 105.3 mm, Core L - 57.0 mm, Shaft L - 152.0 mm, DE Shaft L - 44.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17752**

**REPLACES:** 2650128, 2650149.  
**APPLICATIONS:** Chevrolet Corvette, Chevrolet Suburban, GMC Yukon XL 5.3L, Infiniti QX56, Nissan Trucks 4.0L, 5.6L, Pontiac Solstice / Saturn Sky 2.0L.  
**Valeo 140-150 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG15C026, 046, 047, 051, 052, 086, 090, 107, 108, 113, 114; TG15S010, 011, 079, 096.  
**LESTER #'S:** 11018, 11145, 11256, 11259, 11263, 13968, 13969, 13969A.  
**DIMENSIONS:** Rotor D - 105.3 mm, Core L - 57.0 mm, Shaft L - 152.0 mm, DE Shaft L - 44.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17753**

**REPLACES:** 2650279.  
**APPLICATIONS:** Chevrolet / GMC Trucks, Isuzu Trucks, GM Car Applications, Nissan 2.5L, 3.5L.  
**Valeo 100-120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** SG10S037, 039, 042, 044, 049, 050, 051, 057; TG10S012, 015, 016, 017, 019, 020, 022, 049, 050; TG11C076, 087, 088, 089; TG11S010, 011, 050, 051, 053; TG12C014, 035; TG12S041, 047, 089.  
**LESTER #'S:** 11017, 11021, 11047, 11069, 11072, 11148, 11189, 13865, 13944, 13993.  
**DIMENSIONS:** Rotor D - 98.5 mm, Core L - 56.0 mm, Shaft L - 152.0 mm, DE Shaft L - 47.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17754**

**REPLACES:** 2607483, 2650006.  
**APPLICATIONS:** Buick Rendezvous / Pontiac Aztek, Chevrolet Venture / Oldsmobile Silhouette / Pontiac Montana, Saturn Vue (V6).  
**Valeo 125 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** SG12B041; SG12S056, 057, 070, 072, 074, 075, 083, 084, 104, 114, 120; TG13S011, 012, 013, 015, 016, 017, 018, 019, 020, 022, 024, 026, 027, 029, 030, 031, 032, 033, 034, 035; Bosch Reman.: AL8548X, AL8549X, AL8550X, AL8554X, AL8802X, AL8806X, AL8808X.  
**LESTER #'S:** 11022, 11023, 11144, 11147, 11313, 13866, 13938, 13943.  
**DIMENSIONS:** Rotor D - 105.3 mm, Core L - 49.1 mm, Shaft L - 149.2 mm, DE Shaft L - 53.9 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.




**17755**

**REPLACES:** 2650105, 2650320.  
**APPLICATIONS:** Chevrolet / GMC Trucks, Isuzu Trucks, GM Car Applications, Hyundai, Nissan 2.5L.  
**Valeo 120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG12B014; TG12C027, 032, 036, 040, 042, 043, 044, 045, 048, 052, 053, 054, 055, 056, 057, 065, 066, 067, 069, 070, 071, 072, 073, 074, 075, 076, 084, 085; TG12S028.  
**LESTER #'S:** 11017, 11142, 11148, 11258, 11327, 11515.  
**DIMENSIONS:** Rotor D - 98.5 mm, Core L - 56.0 mm, Shaft L - 152.0 mm, DE Shaft L - 47.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - 16 - 1.5.



**17756**

**REPLACES:** 26005915, 2650149.  
**APPLICATIONS:** Chevrolet Equinox 34L 2005-2006, Corvette 5.7L / 6.0L / 6.2L / 7.0L, Pontiac Torrent 34L 2006, Nissan 4.0L / 5.6L.  
**Valeo 145 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG15C026, 046, 047, 051, 052, 086, 089, 090, 107, 108, 113, 114, 139, 140, 158, 159; TG15S039, 079, 096, 147, 179, 180, 192.  
**LESTER #'S:** 11018, 11256, 11259, 11263, 11145, 13968, 13969, 13969A.  
**DIMENSIONS:** Rotor D - 105.3 mm, Core L - 57.0 mm, Shaft L - 152.0 mm, DE Shaft L - 44.5 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 14.5 mm, Threads - 16 - 1.5.



**17757**

**REPLACES:** 2606727, 2606762.  
**APPLICATIONS:** Chevrolet Cobalt / HHR 2.0L Turbo, 2.2L, 24L, Malibu 24L, Pontiac G5 2.2L.  
**Valeo 120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** FG12S010, 011, 018, 019, 020, 027, 031, 032, 033, 043, 045, 048, 054, 064, 065, 070, 071, 085.  
**LESTER #'S:** 11265, 11266, 11356, 11357.  
**DIMENSIONS:** Rotor D - 98.3 mm, Core L - 54.5 mm, Shaft L - 152.0 mm, DE Shaft L - 49.0 mm, DE Shaft D - 17 mm, SRE Shaft D - 15 mm, Slip Ring D - 144 mm, Threads - M16 - 1.5.



**17759**

**REPLACES:** 595274.  
**APPLICATIONS:** BMW X5 3.0L Diesel / 4.8L, X6 3.0L Diesel, Dodge Sprinter 3.0L Diesel, Mercedes 3.0L Diesel.  
**Valeo 220-230 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG23C011, 012, 013, 017, 018, 019, 022, 033, 034, 035; 439602, 439603, 439606, 439609, 439809.  
**LESTER #'S:** 11394, 11397, 11451, 11457, 20091.